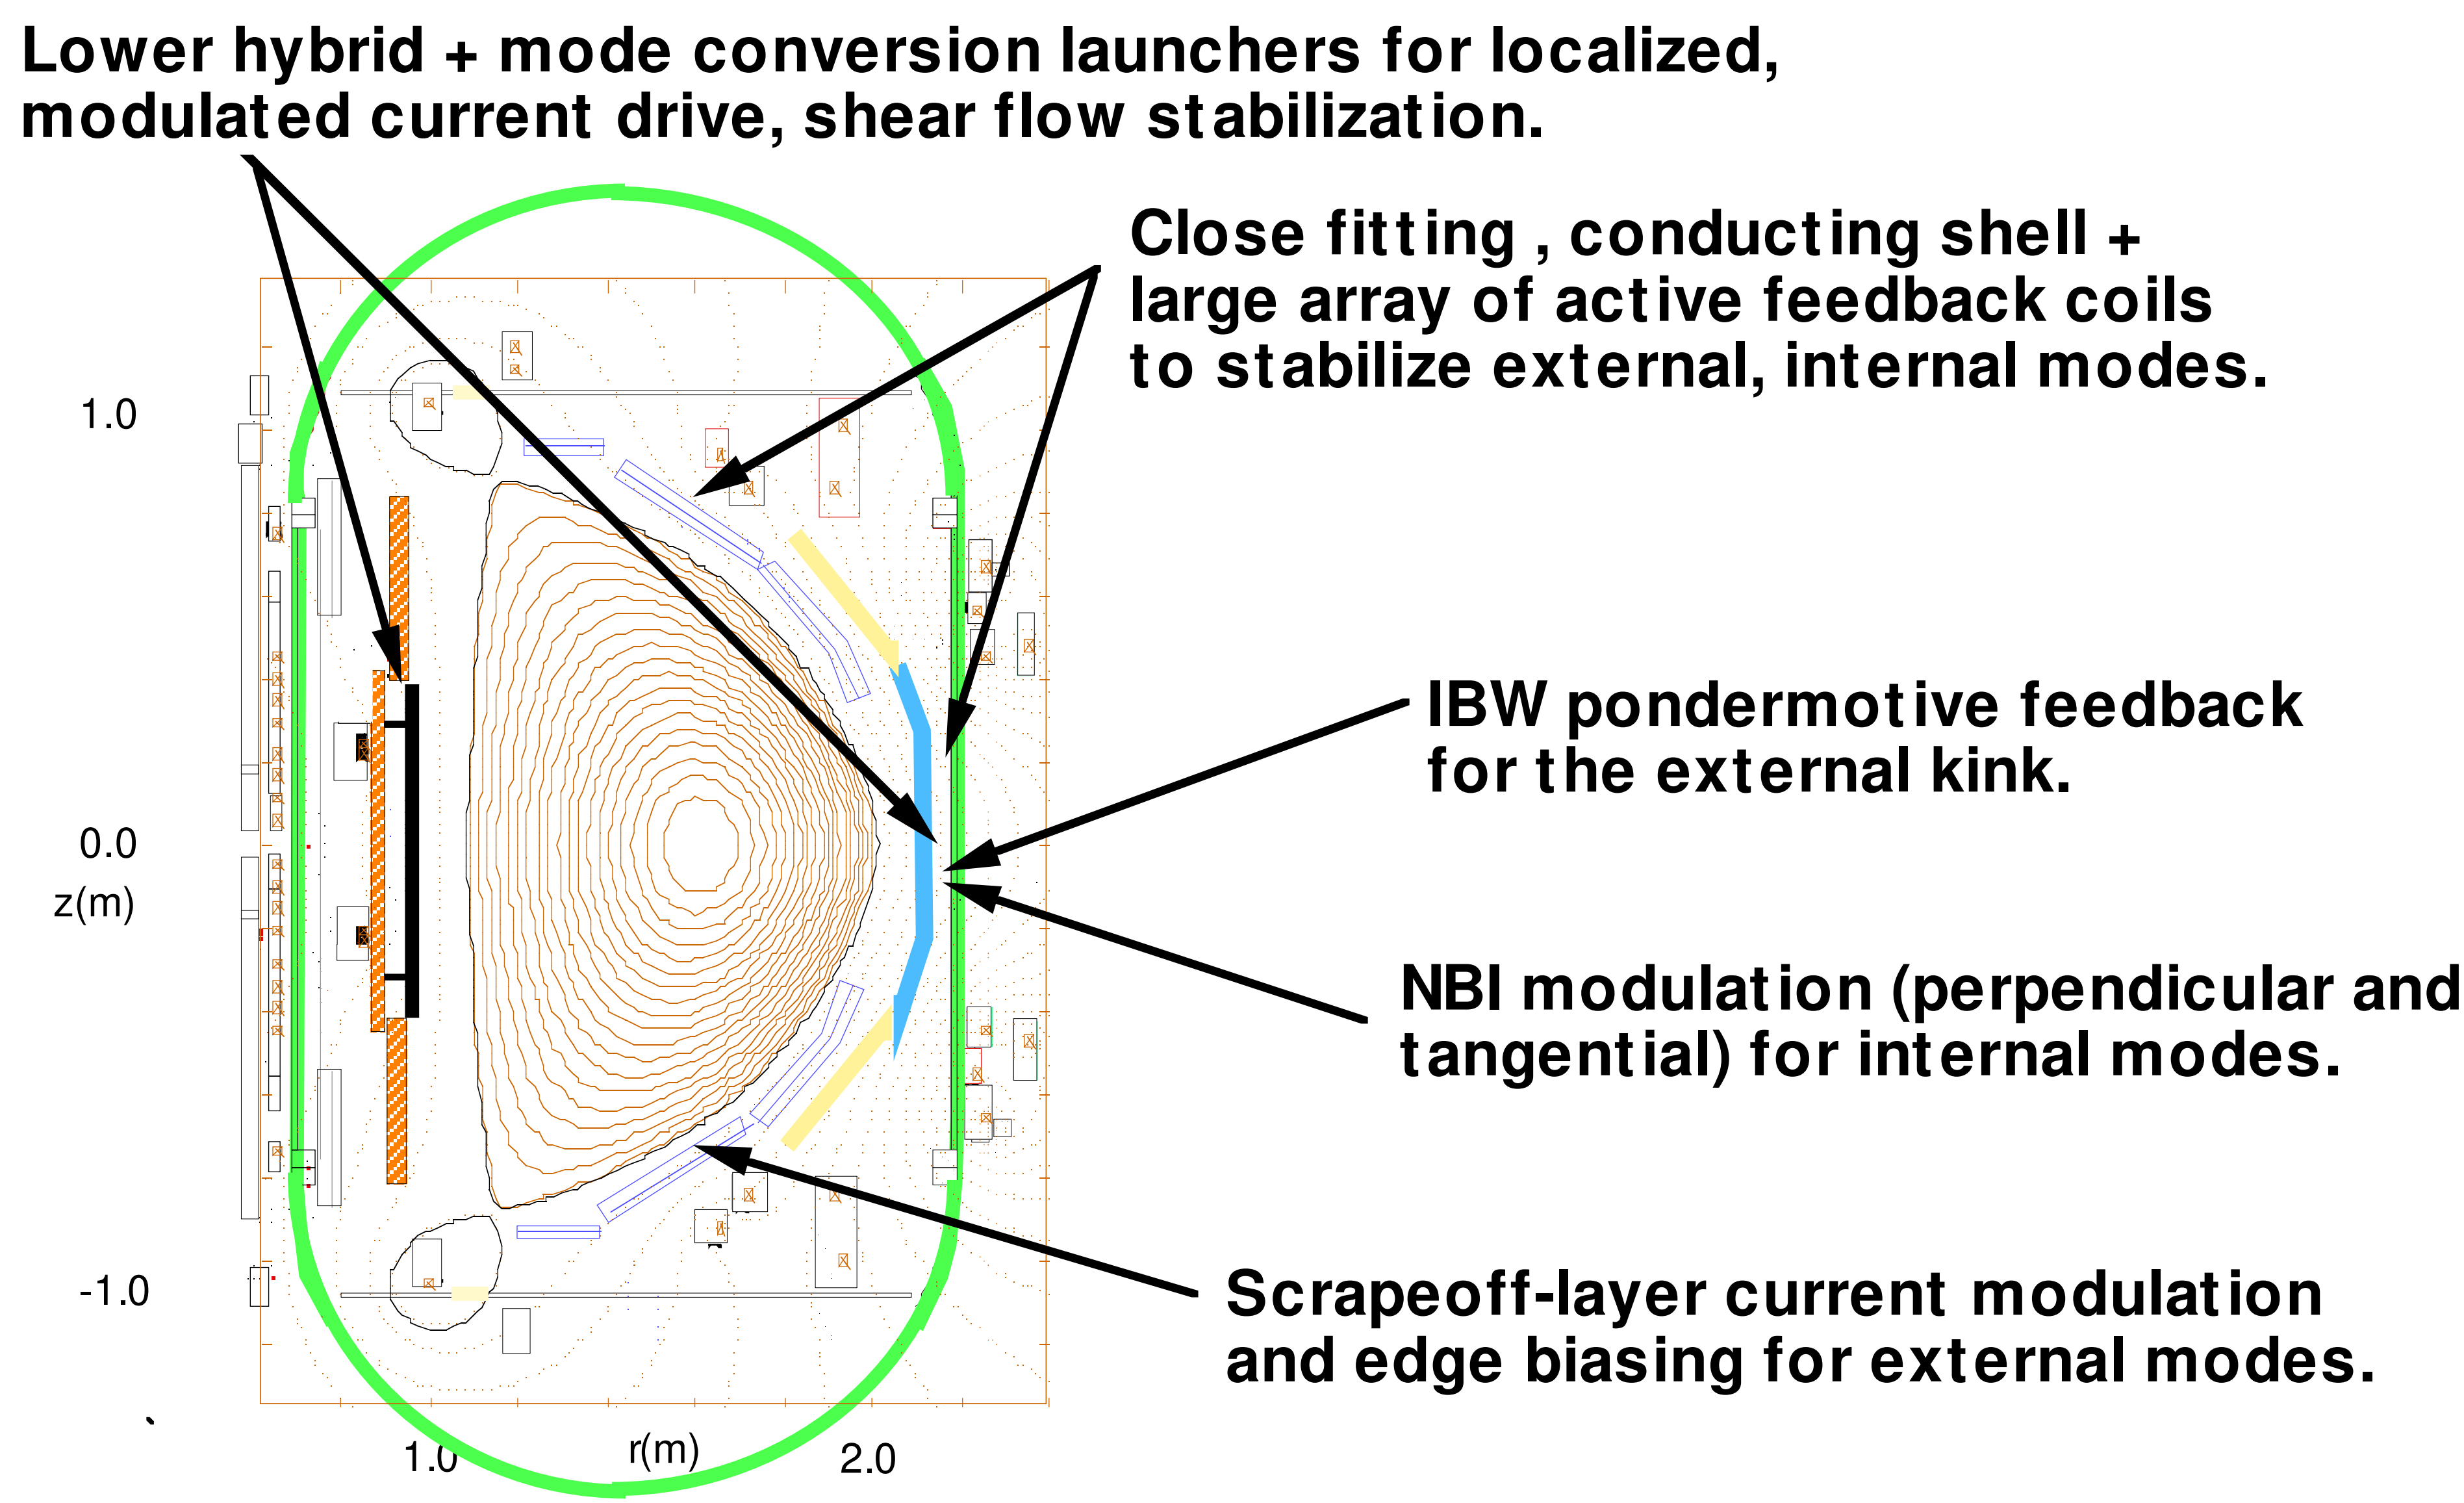
Lower hybrid + mode conversion launchers for localized, modulated current drive, shear flow stabilization.
Close fitting , conducting shell + large array of active feedback coils to stabilize external, internal modes.
IBW pondermotive feedback for the external kink.
NBI modulation (perpendicular and tangential) for internal modes.
Scrapeoff-layer current modulation and edge biasing for external modes.
1.0
0.0
z(m)
-1.0
1.0
r(m)
2.0

Fig. 1