

PREPARED FOR THE U.S. DEPARTMENT OF ENERGY,  
UNDER CONTRACT DE-AC02-76CH03073

PPPL-3876  
UC-70



PPPL-3876

**Progress Towards High Performance,  
Steady-state Spherical Torus**

by

M. Ono, M.G. Bell, R.E. Bell, T. Bigelow, M. Bitter, W. Blanchard, J. Boedo,  
C. Bourdelle, C. Bush, W. Choe, J. Chrzanowski, D.S. Darrow, S.J. Diem,  
R. Doerner, P.C. Efthimion, J.R. Ferron, R.J. Fonck, E.D. Fredrickson,  
G.D. Garstka, D.A. Gates, T. Gray, and 124 additional co-authors  
representing 28 institutions

October 2003

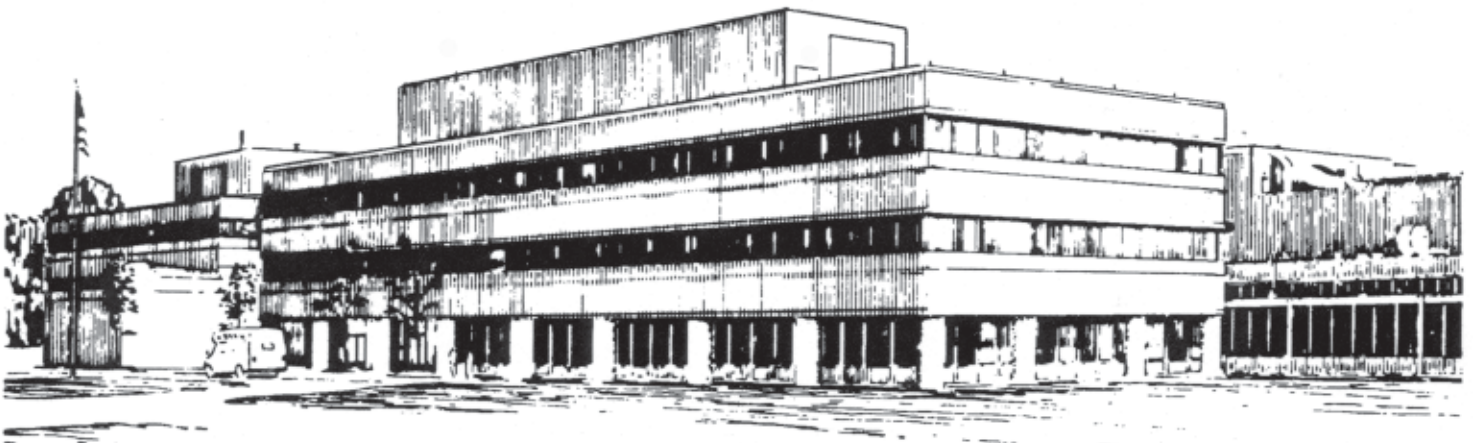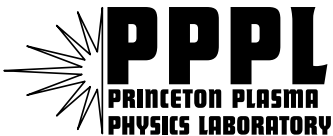

**PRINCETON PLASMA PHYSICS LABORATORY  
PRINCETON UNIVERSITY, PRINCETON, NEW JERSEY**

## **PPPL Reports Disclaimer**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

## **Availability**

This report is posted on the U.S. Department of Energy's Princeton Plasma Physics Laboratory Publications and Reports web site in Fiscal Year 2004. The home page for PPPL Reports and Publications is: [http://www.pppl.gov/pub\\_report/](http://www.pppl.gov/pub_report/)

DOE and DOE Contractors can obtain copies of this report from:

U.S. Department of Energy  
Office of Scientific and Technical Information  
DOE Technical Information Services (DTIS)  
P.O. Box 62  
Oak Ridge, TN 37831

Telephone: (865) 576-8401

Fax: (865) 576-5728

Email: [reports@adonis.osti.gov](mailto:reports@adonis.osti.gov)

This report is available to the general public from:

National Technical Information Service  
U.S. Department of Commerce  
5285 Port Royal Road  
Springfield, VA 22161

Telephone: 1-800-553-6847 or  
(703) 605-6000

Fax: (703) 321-8547

Internet: <http://www.ntis.gov/ordering.htm>

## Progress towards high performance, steady-state Spherical Torus\*

M. Ono, M.G. Bell, R.E. Bell, T. Bigelow<sup>1</sup>, M. Bitter, W. Blanchard, J. Boedo<sup>2</sup>, C. Bourdelle<sup>3</sup>, C. Bush<sup>1</sup>, W. Choe<sup>4</sup>, J. Chrzanowski, D.S. Darrow, S.J. Diem<sup>5</sup>, R. Doerner<sup>2</sup>, P.C. Efthimion, J.R. Ferron<sup>6</sup>, R.J. Fonck<sup>5</sup>, E.D. Fredrickson, G.D. Garstka<sup>5</sup>, D.A. Gates, T. Gray, L.R. Grisham, W. Heidbrink<sup>7</sup>, K.W. Hill, D. Hoffman, T.R. Jarboe<sup>8</sup>, D.W. Johnson, R. Kaita, S.M. Kaye, C. Kessel, J.H. Kim<sup>4</sup>, M.W. Kissick<sup>5</sup>, S. Kubota<sup>9</sup>, H.W. Kugel, B.P. LeBlanc, K. Lee<sup>10</sup>, S.G. Lee<sup>11</sup>, B.T. Lewicki<sup>5</sup>, S. Luckhardt<sup>2</sup>, R. Maingi<sup>1</sup>, R. Majeski, J. Manickam, R. Maqueda<sup>12</sup>, T.K. Mau<sup>2</sup>, E. Mazzucato, S.S. Medley, J. Menard, D. Mueller, B.A. Nelson<sup>8</sup>, C. Neumeyer, N. Nishino<sup>13</sup>, C.N. Ostrander<sup>5</sup>, D. Pacella<sup>14</sup>, F. Paoletti<sup>15</sup>, H.K. Park, W. Park, S.F. Paul, Y.-K. M. Peng<sup>1</sup>, C.K. Phillips, R. Pinsky<sup>6</sup>, P.H. Probert<sup>5</sup>, S. Ramakrishnan, R. Raman<sup>8</sup>, M. Redi, A.L. Roquemore, A. Rosenberg, P.M. Ryan<sup>1</sup>, S.A. Sabbagh<sup>15</sup>, M. Schaffer<sup>6</sup>, R.J. Schooff<sup>5</sup>, R. Seraydarian<sup>2</sup>, C.H. Skinner, A.C. Sontag<sup>5</sup>, V. Soukhanovskii, J. Spaleta, T. Stevenson, D. Stutman<sup>15</sup>, D.W. Swain<sup>1</sup>, E. Synakowski, Y. Takase<sup>17</sup>, X. Tang<sup>12</sup>, G. Taylor, J. Timberlake, K.L. Tritz<sup>5</sup>, E.A. Unterberg<sup>5</sup>, A. Von Halle, J. Wilgen<sup>1</sup>, M. Williams, J.R. Wilson, X. Xu<sup>18</sup>, S.J. Zweben, R. Akers<sup>19</sup>, R.E. Barry<sup>1</sup>, P. Beiersdorfer<sup>18</sup>, J.M. Bialek<sup>15</sup>, B. Blagojevic<sup>16</sup>, P.T. Bonoli<sup>20</sup>, M.D. Carter<sup>1</sup>, W. Davis, B. Deng<sup>10</sup>, L. Dudek, J. Egedal<sup>20</sup>, R. Ellis, M. Finkenthal<sup>16</sup>, J. Foley, E. Fredd, A. Glasser<sup>12</sup>, T. Gibney, M. Gilmore<sup>21</sup>, R.J. Goldston, R.E. Hatcher, R.J. Hawryluk, W. Houlberg<sup>1</sup>, R. Harvey<sup>22</sup>, S.C. Jardin, J.C. Hosea, H. Ji, M. Kalish, J. Lowrance<sup>23</sup>, L.L. Lao<sup>6</sup>, F.M. Levinton<sup>24</sup>, N.C. Luhmann<sup>10</sup>, R. Marsala, D. Mastravito, M.M. Menon<sup>1</sup>, O. Mitarai<sup>25</sup>, M. Nagata<sup>26</sup>, G. Oliaro, R. Parsells, T. Peebles<sup>9</sup>, B. Peneflor<sup>6</sup>, D. Piglowski, G.D. Porter<sup>17</sup>, A.K. Ram<sup>19</sup>, M. Rensink<sup>17</sup>, G. Rewoldt, P. Roney, K. Shaing<sup>5</sup>, S. Shiraiwa<sup>16</sup>, P. Sichta, D. Stotler, B.C. Stratton, R. Vero<sup>15</sup>, W.R. Wampler<sup>27</sup>, G.A. Wurden<sup>11</sup>

*Princeton Plasma Physics Laboratory, Princeton University, New Jersey, USA*

<sup>1</sup> *Oak Ridge National Laboratory, Oak Ridge, Tennessee, USA*

<sup>2</sup> *University of California, San Diego, California, USA*

<sup>3</sup> *CEA Cadarache, France*

<sup>4</sup> *Korea Advanced Institut of Science and Technology, Taejon, Republic of Korea*

<sup>5</sup> *University of Wisconsin, Wisconsin, USA*

<sup>6</sup> *General Atomics, San Diego, California, USA*

<sup>7</sup> *University of California, Irvine, California, USA*

<sup>8</sup> *University of Washington, Seattle, Washington, USA*

<sup>9</sup> *University of California, Los Angeles, California, USA*

<sup>10</sup> *University of California, Davis, California, USA*

- <sup>11</sup> *Korea Basic Science Institute, Taejon, Republic of Korea*
- <sup>12</sup> *Los Alamos National Laboratory, Los Alamos, New Mexico, USA*
- <sup>13</sup> *Hiroshima University, Hiroshima, Japan*
- <sup>14</sup> *ENEA, Frascati, Italy*
- <sup>15</sup> *Columbia University, New York, N.Y., USA*
- <sup>16</sup> *Johns Hopkins University, Baltimore, Maryland, USA*
- <sup>17</sup> *Tokyo University, Tokyo, Japan*
- <sup>18</sup> *Lawrence Livermore National Laboratory, Livermore, California, USA*
- <sup>19</sup> *Euratom-UKAEA Fusion Association, Abingdon, Oxfordshire, United Kingdom*
- <sup>20</sup> *Massachusetts Institute of Technology, Cambridge, Massachusetts, USA*
- <sup>21</sup> *University of New Mexico at Albuquerque, New Mexico, USA*
- <sup>22</sup> *Compx, Del Mar, California, USA*
- <sup>23</sup> *Princeton Scientific Instruments, Princeton, New Jersey, USA*
- <sup>24</sup> *Nova Photonics, Princeton, New Jersey, USA*
- <sup>25</sup> *Kyushu Tokai University, Kumamoto, Japan*
- <sup>26</sup> *Himeji Institute of Technology, Okayama, Japan*
- <sup>27</sup> *Sandia National Laboratories, Albuquerque, New Mexico, USA*

**Abstract** - Research on the Spherical Torus (or Spherical Tokamak) is being pursued to explore the scientific benefits of modifying the field line structure from that in more moderate aspect ratio devices, such as the conventional tokamak. The ST experiments are being conducted in various US research facilities including the MA-class National Spherical Torus Experiment (NSTX) at Princeton, and three medium size ST research facilities: Pegasus at University of Wisconsin, HIT-II at University of Washington, and CDX-U at Princeton. In the context of the fusion energy development path being formulated in the US, an ST-based Component Test Facility (CTF) and, ultimately a Demo device, are being discussed. For these, it is essential to develop high performance, steady-state operational scenarios. The relevant scientific issues are energy confinement, MHD stability at high beta ( $\beta$ ), non-inductive sustainment, ohmic-solenoid-free start-up, and power and particle handling. In the confinement area, the NSTX experiments have shown that the confinement can be up to 50% better than the ITER-98-pby2 H-mode scaling, consistent with the requirements for an ST-based CTF and Demo. In NSTX, CTF-relevant average toroidal beta values  $\beta_T$  of up to 35% with the near unity central  $\beta_T$  have been obtained. NSTX will be exploring advanced regimes where  $\beta_T$  up to 40% can be sustained through active stabilization of resistive wall modes. To date, the most successful technique for non-inductive sustainment in NSTX is the high beta-poloidal

regime, where discharges with a high non-inductive fraction (~60% bootstrap current + NBI current drive) were sustained over the resistive skin time. Research on radio-frequency based heating and current drive utilizing HHFW and EBW is also pursued on NSTX, Pegasus, and CDX-U. For non-inductive start-up, the Coaxial Helicity Injection (CHI), developed in HIT/HIT-II, has been adopted on NSTX to test the method up to  $I_p \sim 500$  kA. In parallel, startup using RF current drive and only external poloidal field coils are being developed on NSTX. The area of power and particle handling is expected to be challenging because of the higher power density is expected in the ST relative to that in conventional aspect-ratio tokamaks. Due to its promise for power and particle handling, liquid lithium is being studied in CDX-U as a potential plasma-facing surface for a fusion reactor.

**Introduction** – The spherical torus [1] (ST) research conducted worldwide has made remarkable progress in recent years. In the US, ST experimental research is carried out in several facilities including National Spherical Torus Experiment (NSTX) [2] and CDX-U [3] at Princeton Plasma Physics Laboratory, PEGASUS [4] at University of Wisconsin, and HIT-II [5] at University of Washington. Within the US ST research effort, the Innovative Confinement Concept (ICC) program, the Innovative Diagnostic Development program, the US theory program and the Virtual Laboratory for Technology program are four crucial elements. The ST program is presently focusing on two broad goals. The first goal is to assess the attractiveness of the ST as a fusion energy concept such as the ST-based Component Test Facility (CTF) and Demo. The US ST program is indeed well aligned with the recently developed fusion energy development path plan [6]. The second goal is to use ST plasma characteristics to foster a deeper understanding of critical toroidal physics issues.

**Scientifically important ST issues** – The ST configuration offers the following physics conditions to develop a deeper understanding of high temperature toroidal plasmas as well as astrophysics plasmas:

- High average toroidal beta  $\langle \beta_T \rangle$  of ~ 40% and order unity central beta  $\beta_0$  plasmas. Because of the favorable MHD stability at low aspect ratio  $A=R/a < 2$  [1], the ST plasmas have already accessed high average toroidal beta of 35-40% and central beta of order unity. This property permits fusion power production at a relative low

confining toroidal field and, thus, reduces the power plant cost and recirculating power. The unity beta condition is also relevant for the physics of space plasmas.

- Strong plasma shaping & self-fields ( $A \geq 1.27$ ,  $\beta \leq 0.8$ ,  $\beta \geq 2.5$ ,  $B_p/B_t \sim 1$ ). Because of the strong toroidicity and shaping produced in ST plasmas, research in these extreme conditions could lead to improved and deeper understanding of all toroidal plasmas.
- Large plasma Mach number ( $V_{\text{rotation}}/V_A \sim 0.3$ ). Since at unity beta, the Alfvén velocity  $V_A$  approaches the ion thermal velocity, it is relatively easy to access high Alfvén Mach number plasmas. This property could relax the condition for the wall stabilization by the plasma rotation for ST reactor.
- Large flow shearing rate ( $\partial_{\text{E} \times \text{B}} \sim 10^6/\text{s}$ ). With strong plasma rotation and toroidicity, ST plasmas could generate significant sheared flows, which could suppress the long wave length turbulence to improve confinement.
- Supra-Alfvénic fast ions ( $V_{\text{fast}}/V_A \sim 4-5$ ). Again, this condition can be readily created because of the low Alfvén velocity of ST. The wave-particle interactions in this regime could be of relevance to the alpha particle physics in burning plasmas such as ITER.
- High dielectric constant ( $\epsilon \sim 50$ ). The high plasma dielectric constant drastically modifies the propagation characteristics of some plasma waves. While this property excludes using certain types of plasma waves such as ECH and lower hybrid waves, it gives rise to new opportunities for waves such as high harmonic fast waves (HHFW) and electron Bernstein waves (EBW).
- Large mirror ratios in edge B field. Near the plasma boundary, the toroidal field could vary as much as a factor of 5, producing a large mirror ratio. This property can modify the edge power flow.

**Physics requirements for the steady-state high-performance plasmas** – It is important to note that unique physics properties of the ST described above could also help the ST achieve its long-range goal of steady-state operation at high performance, which is needed for ST-based reactors. The physics requirements for ST fusion systems can be summarized as follows:

- MHD stability at high  $\beta_T$  and  $\beta_N$ : To produce required fusion power at low toroidal field, high  $\beta_T$  is needed. Since self-driven current fraction is proportional to  $\beta_T \beta_p =$

$\beta_N \approx 2m_0 \mu_0 I_p / B_P^2$  and  $\beta_T \approx \beta_N^2 / \beta_P$ , very high value of normalized beta  $\beta_N$  is needed for high bootstrap current fraction. Typically,  $\beta_T \sim 20\%$ ,  $\beta_N \sim 6$  is needed for CTF and much more challenging  $\beta_T \geq 40\%$ ,  $\beta_N \sim 8$  is needed for Power Plants (e.g., ARIES-ST). This power plant regime will require advanced ST operations with plasma beta near the ideal stability limits and therefore will likely to require some kind of active feed back stabilization of MHD modes.

- **Transport and Confinement:** Since the fusion power production is very strong function of the plasma confinement ( $P_{\text{fusion}}$  is proportional to the H-factor to as much as 7<sup>th</sup> power), it is important to understand the confinement trends and improve the predictive capability of confinement. The systems code studies of ST-based CTF and Power Plant design suggest that the required global confinement should be in the range of  $H_{98\text{py},2} \sim 1.4 - 1.7$ .
- **Power and Particle Handling:** Because of the small major radius of ST reactors, the expected P/R is much larger than that of conventional fusion reactors by a factor of  $\sim 2$  to 3. While, this is a stringent requirement, the unique ST geometry may provide a solution to this problem such as large flux expansion together with innovative plasma facing component solution such as liquid lithium.
- **Solenoid-Free Start-Up:** The elimination of in-board solenoid is required for the ST to be an attractive fusion power plant, since an in-board solenoid, along with the shielding needed for its insulation, increases the size and, hence, the cost of the plant. Thus, ST-based fusion systems including the CTF and power plant designs, assume complete elimination of the central solenoid.
- **Integrating Scenarios:** While it is often logical and convenient to explore each physics topic independently to facility understanding, it is necessary to demonstrate all the essential aspects of the physics requirements simultaneously in an integrated manner to be credible as a fusion system.

**US ST Facilities** – There are four US ST facilities. The National Spherical Torus Experiment (NSTX) at the Princeton Plasma Physics Laboratory (PPPL) is a 1 MA class facility designed to evaluate the physics principles of the ST. The NSTX facility efficiently utilized the TFTR site capability in terms of power supplies and auxiliary heating systems to optimize the facility. There are three smaller facilities dedicated to study targeted innovative ST research areas. The PEGASUS facility at University of Wisconsin is a few 100 kA class facility designed to investigate the very low aspect

ratio region and aimed to bridge the physics gap between spheromaks and STs. The HIT-II facility is also a few 100 kA class facility dedicated to develop an innovative non-inductive plasma start-up concept based on coaxial helicity injection (CHI). The CDX-U facility at PPPL is now focusing its effort to test lithium coating and liquid lithium plasma facing components to develop an attractive power and particle handling methods for STs. The following table shows achieved parameters of the four facilities:

Devices	NSTX	PEGASUS	HIT-II	CDX-U
$I_p$ (MA)	1.5	0.2	0.26	0.1
R (m)	0.86	0.25- 0.45	0.3	0.33
$A(\equiv R/a)$	1.26	1.2	1.5	1.5
$B_T R$ (T-m)	0.5	0.03	0.15	0.07
$\tau$ pulse (sec)	1.1	0.1	0.1	0.025
Elongation	2.2	1 – 3.5	1.5	1.55
OH flux ( $W_b$ )	0.7	0.1	0.06	0.1
NBI (MW)	7	—	—	—
HHFW (MW)	6	1	—	0.1
CHI (MA)	0.4	—	0.2	—

Table 1

**Progress on MHD stability at high  $\beta_T$  and  $\beta_N$  in NSTX** - The beta limit investigations were conducted mainly in NSTX due to its strong auxiliary heating capability [7]. The PEGASUS device also investigated the plasma beta with ohmic heating taking advantage of the low-aspect ratio geometry as described below. In Fig. 1, the achieved normalized  $\beta_T$  vs normalized  $\beta_{pol}$  data points are shown. In 2001, rapid progress was made to reach  $\beta_T \sim 25\%$  which is near the so-called no-wall beta limit, i.e. in the absence of the stabilizing effects of a nearby conducting wall as shown by the black diamonds. In 2002, after realigning the outer poloidal field coils, the  $n=1$  error field component was reduced by a factor of 10. This error field reduction improved the plasma beta values dramatically as shown in the figure as shown by the red (or lighter) diamonds. The maximum  $\beta_T$  value increased to 35% and the maximum  $\beta_{pol}$  value doubled from 0.6 to 1.4. The  $\beta_T$  of 35% data point ( $\beta =$



2,  $A = 1.38$ ) is shown by the highest data point in the vertical scale in the figure. This improvement was also aided by the ready access to the H-mode which broadened the pressure profiles which improves MHD stability [8]. Analysis of many plasmas with high  $\beta_N$  indicates that the no-wall stability limit has been indeed exceeded, and that wall stabilization is a critical player in achieving these high beta states [9]. In Fig. 2, the evolution of the  $\beta_T \sim 35\%$  shot is shown. As can be seen from the figure, the discharge reached 35%  $\beta_T$  shortly after entering H-mode. The presence of an  $n=1$  / $m=1$  mode seems to regulate the beta value and maintained the high beta value for a period of over energy confinement time until the end of current flattop. In Fig. 3, we show the high poloidal beta shot at 800 kA. As can be seen, the loop voltage drops from 2 V to about 0.1V around  $t = 0.3$  s coincident with the rise of  $\beta_p$ . The non-inductive current drive fraction is calculated to be about 60% due to the bootstrap currents and NBI current drive in this phase. The plasma internal inductance  $l_i$  stays nearly constant for about 400 ms much longer than the plasma current skin time of  $\sim 200$  ms. The H-mode which kept the pressure profile broad and minimize  $q$ -minimum (calculated by EFIT) staying around 2 contributed to the MHD stability. The rapid plasma rotation contributed to the stability through the wall stabilization allowing the plasma to stay above the no-wall stability limit for many tens of wall resistive times of  $\sim 10$  ms. The achieved parameters  $\beta_N \times H_{89P} \sim 15$  with  $\beta_T \sim 15\%$  of the high poloidal beta discharges is already comparable to that is required for CTF. The plasma density however rises continuously which indicates that the particle control is an issue which must be addressed in order to realize truly steady state regime [10].

***PEGASUS High Beta Experiment*** - High toroidal beta plasmas are obtained in PEGASUS by operation at very low toroidal field, and cover a regime of  $\beta_T$  vs  $I_N$  space similar to neutral-beam heated high- $\beta_T$  plasmas in START and other ST experiments (Fig. 4)[4]. As indicated,  $\beta_T$  values up to 25% and  $\beta_N \sim 5$  have been obtained with no evidence of a beta limit to date. Densities range up to the Greenwald limit ( $\sim I_p/\pi a^2$ ). Stored energies are consistent with values expected from the ITER98pby confinement scaling. Plasma startup is characterized by high current ramp rates (15-45 MA/s), low internal inductance ( $l_i \sim 0.3$ ), and high elongation. Two-dimensional images of X-ray emission from Pegasus plasmas have enabled, for the first time, non-perturbative measurement of the plasma current profile in a

spherical torus [4]. This measurement is accomplished by determining intensity contours from the image and using the contours as inputs in the solution of the MHD equilibrium state. The shape of the contours is a strong constraint on the current profile and thus the q-profile in the equilibrium reconstruction. A resulting q-profile shows near-zero central shear. Plasmas with  $\beta_T \sim 1$  as  $A$  approaches unity in the tokamak-spheromak overlap region appear accessible with the addition of planned new capabilities which are aimed at lowering the plasma resistivity and manipulating the evolution of the q-profile to suppress limiting MHD activity. These include high-power RF heating, a transient increase in the toroidal field for a stabilized formation stage, loop voltage control and significantly increased ohmic volt-seconds, an upgraded equilibrium field system for shape and position control, and separatrix operation. Operation with a two-strap high-power Higher Harmonic Fast Wave heating system has begun. Initial loading tests show an impedance of 1 Ohm, and up to 200 kW has been injected to date. TSC (Tokamak Simulation Code) modeling of fast TF rampdown scenarios indicate accessible paths to regimes of higher current and increased stored energy.

***Supra-Alfvénic fast ion induced high Frequency MHD*** – Owing to high beta, the ST plasmas provide a good test bed to investigate wave-particle interactions for the Supra-Alfvénic fast ions ( $V_{\text{NBI}}/V_A \sim 4-5$ ). This type of regime is similar to those encountered for alpha-heated discharges such as ITER. In the NSTX NBI heated discharges, a wide variety of high frequency MHD instabilities has been detected at frequencies ranging from a few kHz to many MHz [11-13]. In the frequency range below about 200 kHz, a form of the fishbone or energetic particle mode has been seen, as well as modes that appear to be similar to the Toroidal Alfvén Eigenmode (TAE) of conventional tokamaks. Unlike in conventional tokamaks, the frequency ranges of these two classes of instabilities have substantial overlap, complicating the experimental identification and theoretical analysis. Significant fast ion losses have been correlated, under some conditions, with the appearance of both of these types of modes.

**Progress on Transport and Confinement** - The global confinement times in neutral beam heated NSTX plasmas compare favorably to the ITER-89P empirical scaling expression as well as the ITER-98 (pby,2) scaling rule [14, 15]. In recent years, H-

mode operation has become routine on NSTX, aided by improved wall conditioning and the reduced error fields. Access to the H-mode is easiest in the lower single null configuration, but H-modes have been obtained in double null as well. The power threshold is several hundred kW and is exhibiting a secular fall as wall conditions improve. Gas injection on the high field side produces H-mode access more easily compared to low field side gas injection [8]. In Fig. 5, NSTX H-mode experimental confinement data points obtained in quasi-steady conditions are shown compared to the ITER 98py2 H-mode scaling. The solid circles are the global confinement time and the diamonds are the confinement with energetic component and NBI prompt loss components removed. The H-mode data shows up to 50 % global confinement improvement compared to the H-mode scaling. The level of confinement enhancement is comparable to that is needed for the future ST devices. The global confinement scaling study has begun on NSTX. Accurate determination of R/a dependence is an active International Tokamak Physics Activity (ITPA) research topic. The L-mode data shows a similar scaling to that in the conventional aspect ratio tokamaks  $\tau_E^{\text{NSTX-L}} \sim I_p^{0.76} B_T^{0.27} P^{-0.76}$ . The H-mode data on the other hand shows less power degradation  $P^{-0.5}$  which is encouraging. But it should be also noted that the H-mode parametric dependencies are turning out to be more complex and non-linear, showing the need for further refinement for this low-aspect-ratio high beta ST regimes.

**Transport diffusivities** - The power balance analysis of the NSTX NBI heated discharges, is shown in Fig. 6. The ion thermal conductivity  $\chi_i$  appears to track the predictions from neoclassical theory quite well, and electron thermal conductivity  $\chi_e$  that is significantly larger than  $\chi_i$ . The momentum diffusivity  $\chi_\parallel$  is much smaller than  $\chi_i$  in this analysis, qualitatively consistent with expectations from neoclassical theory. The observed ordering is therefore  $\chi_\parallel < \chi_i \approx \chi_{\text{neo}} < \chi_e$ . In general, the observed diffusivity profiles are unusual in that the thermal diffusivities are falling with minor radius. This type of diffusivity profile tends to give broader pressure profiles, which is favorable for plasma high beta stability. Owing to the small  $\chi_\parallel$ , the NSTX plasma rotates relatively rapidly at 200 – 300 km/s reaching a rather high Mach number of  $V_{\text{rotation}}/V_A \sim 0.3$ . The improved ion confinement appears to be indeed correlated with the plasma rotation. The plasma rotation could also provide stabilizing influence on the MHD modes as discussed earlier. The observed  $\chi_i \sim \chi_{\text{neo}}$  and  $\chi_\parallel < \chi_i$  suggest long

wavelength turbulence may be suppressed. In order to develop fundamental understanding of the plasma transport, a variety of theoretical tools are utilized. The growth rates computed by a gyro-kinetic based transport modeling code (GS2) indeed show that the ExB shearing rate is sufficiently higher than the predicted growth rates of ITG (Ion Temperature Gradient Mode) range turbulence as shown in Fig. 7, consistent with the low ion thermal diffusivity [16, 17]. In the ETG (Electron Temperature Gradient Mode) range of short wavelength modes, the linear instability growth-rate is significantly larger than the shearing rate, consistent with relatively large observed  $\chi_e$ . This neo-classical ion transport regime can provide a unique test bed to investigate the electron transport physics in NSTX.

**Progress on Power and Particle Handling** – The NSTX boundary physics research thus far focused on power and particle balance [10]. High heat flux on the target plate has been measured in lower-single null (LSN) divertor plasmas. The peak heat flux in a lower single null ELM-free H-mode plasmas with 4.5 MW of heating power has reached  $10 \text{ MWm}^{-2}$ , with a full-width at half-maximum of 2 cm at the outer target plate approaching the spatial resolution of the IR camera used to make the measurement. Peak heat flux in H-mode plasmas increases with NBI heating power. The peak heat flux at the inboard target is typically  $0.5 - 1.5 \text{ MW/m}^2$ , with a profile full-width half maximum of  $\sim 10$  cm. The power flowing to the inboard side is typically 0.2 – 0.33 of the outboard power. Similar in-out asymmetry ratios have been observed in the MAST device [18]. Double-null high triangularity discharges appear to have much lower peak heat flux than lower-single null. A preliminary measurement is shown in Fig. 8 which shows much lower heat flux  $\sim 3 \text{ MW/m}^2$ , consistent with the greater flux expansion for the high triangularity discharges as shown in Fig. 8. This is a promising result to minimize the peak heat load on the divertor plates. It should be noted that the ARIES-ST configuration also assumes similar high triangularity configuration to reduce the divertor peak heat load to an acceptable level.

**Liquid lithium limiter experiment on CDX-U** - The primary research topic under investigation on CDX-U is the use of liquid metals, and in particular liquid lithium, as plasma facing components (PFCs) for the ST and tokamak. The primary motivation for these experiments is a test of liquid metal PFCs as a potential engineering solution

to the problems of high heat flux and erosion of the first wall, which is expected in a reactor. However, liquid lithium PFCs have attractive physics advantages as well. A shallow toroidal tray, which encircles the center stack and forms the lower limiting surface for the plasma, has been installed in the vessel. The tray has a major radius of 34 cm, is 10 cm wide and 0.5 cm deep, and is fitted with heaters to allow operation at temperatures up to 500C; the typical temperature during tokamak operation is 300C. The tray has been filled with approximately 1 liter of liquid lithium; a photograph of part of the tray, installed in CDX-U and filled with (highly reflective) liquid lithium is shown in Figure 9. Plasma operation with a bare stainless steel tray and with a liquid lithium-filled tray has been compared. The use of liquid lithium as a limiter material results in a significant reduction in the oxygen impurity in the discharge. Recycling is reduced during lithium operation, resulting in a requirement for an eightfold increase in the gas puffing rate in order to maintain a plasma density comparable to discharges with the bare, fully recycling, stainless steel tray. The plasma loop voltage during lithium operation is reduced from 2V to 0.5V at comparable plasma current. This is consistent with the change in Z-eff from about 3 to near 1. The lithium remains quiescent and is confined to the tray during plasma operation. The performance enhancement produced by the use of lithium as a PFC is far more evident than improvements produced by titanium gettering or boronization in CDX-U. Because of the encouraging results from CDX-U, NSTX will be testing the lithium techniques to solve the heat and particle issues.

**Progress on Solenoid-Free Start-Up** – Due to the importance of the solenoid-free start-up research for the ST, NSTX is investigating two alternative approaches for the central-solenoid-free start-up. The first one is the coaxial helicity injection developed by the HIT-II group at University of Washington [5]. The other is the outer PF coil start-up concept.

**Coaxial Helicity Injection** - This CHI concept is an outgrowth of the spheromak research. A number of smaller helicity injection experiments were performed with some success prior to introducing it on NSTX. On NSTX, CHI has already produced about 400 kA of toroidal current with a record current amplification of 14 accompanied by distinct n=1 relaxation activities [19]. The CHI near term research goal is to establish an understanding of the current penetration process, to confirm the

existence of closed flux surfaces, and to demonstrate coupling of the CHI produced current to other non-inductive current drive methods. Theoretical modeling of CHI have been pursued with 3-D MHD code to understand the reconnection processes during CHI. [20]

***Transient Coaxial Helicity Injection in HIT-II*** – To complement the so-called slow CHI start-up research, an innovative transient CHI start-up method has been developed recently on HIT-II device [5]. By applying a short pulse CHI bias voltage, one can create a high quality (low impurity) CHI discharge which can detach from the electrode and form a closed flux surface discharge. This well formed, clean CHI discharge provides an ideal target for induction. As shown in Fig. 10, this method indeed saves poloidal flux and produces much higher current than the induction only case. Using this method, the HIT-II produced record plasma current of 265 kA. This method will be tested on NSTX. If it works well, one can apply RF heating and current drive to make the plasma start-up and ramp-up completely non-inductive.

***Outer-Poloidal-Field-Coil Start-up*** - While it is very difficult to build a central solenoid for the ST due to the space limitation, the ST geometry offers an interesting possibility to utilize outer PF coils for solenoid-free start-up [21]. By appropriately controlling the outer PF coil currents, one can create a high quality field null as shown in Fig. 11. Using a maximum coil current of 20 kA, this method can generate up to 10 V of loop voltage while retaining a good quality field null for the required duration of 3 msec. The Lloyd condition with strong preionization ( $E_T B_T / B_p > 0.12$  kV/m) can be satisfied for a large plasma volume [22]. The available flux for this case is about 120 mWb, which may be sufficient for generating about 300 kA of plasma current in NSTX. If the Lloyd condition can be further relaxed using strong heating and current drive as observed on JT-60U [23], the flux availability can be further increased for this method. This poloidal field coil start-up will be tested on NSTX since, if proven, it can be readily applied toward future devices.

**Progress on Integrating Scenarios** - While it is often logical to explore each physics topic independently to facility understanding, it is necessary to demonstrate all the essential aspects of the physics requirements simultaneously in an integrated manner to be credible as a fusion system. In order to achieve the ST reactor relevant physics

goals of 40%  $\beta_T$ ,  $I_{NI} = 100\%$ ,  $\beta_{pulse} \gg \beta_{skin}$ , the following additional tools are planned on NSTX.

- Enhanced shaping improves MHD stability. As shown in Fig. 12, the achieved beta values trend favorably toward higher triangularity and high elongation regimes. A planned modification of inner PF coils in NSTX will permit the investigation of the  $\beta = 2.4$  and  $\beta = 0.8$  regime. This favorable trend is consistent with the MHD stability calculations predicting stable 40%  $\beta_T$ , and full non-inductive current sustainment  $I_{NI} = 100\%$  for the  $\beta = 2.4$  and  $\beta = 0.8$  regime.

- Since 40%  $\beta_T$ ,  $I_{NI} = 100\%$  regime requires wall stabilization, NSTX will install active feed back coils to explore the regime approaching the ideal wall limit using the active coil system together with the plasma rotation.

- In order to achieve  $\beta_{pulse} \gg \beta_{skin}$  in the advanced regime, it is important to control heat and particles. Maintenance of moderate plasma density is important for efficient current drive. NSTX plans to install divertor lithium wall coating and cryo-pump system to control the particle exhaust. Improved fueling using supersonic gas injection and advance fueling techniques are also planned.

- The existing 6 MW of HHFW heating [24] contributes both to bootstrap current by raising  $T_e$  and to direct current drive. The electron heating by HHFW has been demonstrated as shown in Fig. 13 (a) where an electron internal transport barrier was formed and resulted in high  $T_e$  regime. In Fig. 13 (b), the current drive was demonstrated by confirming differences in  $V_{loop}$  with co and counter-directed waves maintained for over the skin-time [25]. The observed  $V_{loop}$  differences can be attributable to  $\sim 100$  kA of driven current which is consistent with a theoretical estimate. However, a theoretical modeling calculation indicates that HHFW off-axis CD efficiency may be reduced in the high thermal-ion beta regimes due to the energetic and bulk ion absorption and trapping effects. The energetic ion interaction with HHFW has been observed on NSTX [26].

- The advanced regime also require off-axis current drive of  $\sim 100$  kA to maintain the central  $q \sim 2$ . A 4 MW 15 GHz EBW system is planned to provide needed off-axis CD as well as localized CD to stabilize neo-classical tearing modes as needed. EBW appears not to suffer from parasitic ion absorptions as in the case of HHFW. It should

be also noted that the recent calculations indicate that the so-called Ohkawa current (which is induced by trapping the barely passing particles through perpendicular heating) can greatly enhance the EBW driven current efficiency in the off-axis regions due to the large trapped particle populations in the ST plasmas. The calculated efficiency  $\eta_{ec} = 0.4$  at large  $r/a > 0.5$  compares favorably to ECCD and HHFWCD. The EBW launching efficiency can be optimized using the EBW emission measurements since the process is reversible. As shown in Fig. 14, the EBW emission measurements in NSTX agree well with the theoretical calculations [27]. It is believed that by controlling the edge density gradient, the coupling efficiency can be raised toward 100% as demonstrated in CDX-U [28].

**Conclusions and Discussions** – The ST research is making rapid progress. In the MHD area, NSTX achieved 35%  $\beta_T$  with NBI heating and PEGASUS reached 25%  $\beta_T$  with just ohmic heating. NSTX also reached high  $\beta_p$  regime ( $I_N$  fraction  $\sim 60\%$ ) with  $\beta_N H_{89p} = 15$  at  $\beta_T = 15\%$  sustained over  $\beta_{skin}$ . The  $\beta$  and confinement parameters reached are comparable to that is needed for CTF. Neo-classical-like ion confinement was observed in NBI heated discharges with  $H_{98pby,2} \sim 1.4$ . Very low  $\beta_\perp$  led to a rapid plasma rotation with  $V_{rotation} \sim 0.3 V_A$ . The sheared flow stabilization of long wavelength ITG modes is consistent with the observation. The high-triangularity double-null configuration shows a large reduction in peak heat flux. The CDX-U liquid lithium limiter experiment yielded encouraging results. Two innovative plasma start-up concepts using CHI method developed by HIT-II and outer poloidal field coils are presented. A number of new tools are planned to access the ST power plant relevant advanced regimes of 40%  $\beta_T$  and 100% non-inductive current drive through strong plasma shaping ( $\beta \sim 0.8$ ,  $\beta \sim 2.4$ ) and profile control.

\* This research was supported by DoE contract DE-AC02-76CH03073 and DoE Grant DE-FG02-96ER54375



## References:

- [1] Y-K M. Peng, and D. J. Strickler, Nuclear Fusion 26 (1986) 576.
- [2] E.J. Synakowski et al., Proceedings of the 19th IAEA meeting, Lyon, France 2002, to be published in Nuclear Fusion.
- [3] R. Majeski et al., J. Nucl. Mater. 313-316, 625 (2003)
- [4] G.D. Garstka, et al., Phys. Plasmas 10, 1705 (2003).
- [5] R. Raman, et al., Phys Rev. Lett. 90, 075005-1 (2003).
- [6] FESAC Panel of Development Path. A Plan for the Development of Fusion Energy, Preliminary Report to FESAC," issued March 2003.
- [7] J. Menard et al., at EPS 2003 Conference.
- [8] R. Maingi et al., at EPS 2003 Conference.
- [9] S. Sabbagh et al., Proceedings of the 19th IAEA meeting, Lyon, France 2002, to be published in Nuclear Fusion.
- [10] V.A. Soukhanovskii, et al., at EPS 2003 Conference.
- [11] E. Fredrickson, et al., at EPS 2003 Conference.
- [12] N. Gorelenkov et al., at EPS 2003 Conference.
- [13] E. Belova et al., at EPS 2003 Conference.
- [14] B. LeBlanc et al., at EPS 2003 Conference.
- [15] D. Stutman et al., at EPS 2003 Conference.
- [16] C. Bourdelle et al., accepted for publication in Phys. Plasmas (2003).
- [17] M. Redi et al., at EPS 2003 Conference.
- [18] R. Akers, et al., at EPS 2003 Conference.
- [19] T.R. Jarboe, R. Raman, B.A. Nelson, et al., "Progress with helicity injection current drive," 19th IAEA Fusion Energy Conference, Lyon, IAEA-IC/P 10 (2002).
- [20] X. Tang, 8th International ST Workshop, Nov. 18 – 21, Princeton Plasma Physics Laboratory, Princeton, NJ (2002).
- [21] M. Ono and W. Choe, "Out-Board "Ohmic Induction" Coil for Low-Aspect-Ratio Toroidal Plasma Start-up", Princeton University Patent Disclosure 03-2003-1.
- [22] B. Lloyd, et al., Nuclear Fusion 31, 2031 (1991).
- [23] Y. Takase, et al., the Journal of Plasma and Fusion Research, 78, 719-721 (2002).
- [24] M. Ono, Physics of Plasmas 2, 4075(1995).
- [25] P.M. Ryan et al., IAEA-CN-94/EX/P2-13, Lyon, France (2002)
- [26] S. Medley et al., at EPS 2003 Conference.
- [27] G. Taylor, et al., Phys. Plasmas 10, 1395 (2003)
- [28] B. Jones, et al., Phys. Rev. Lett. 90, 165001(2003)

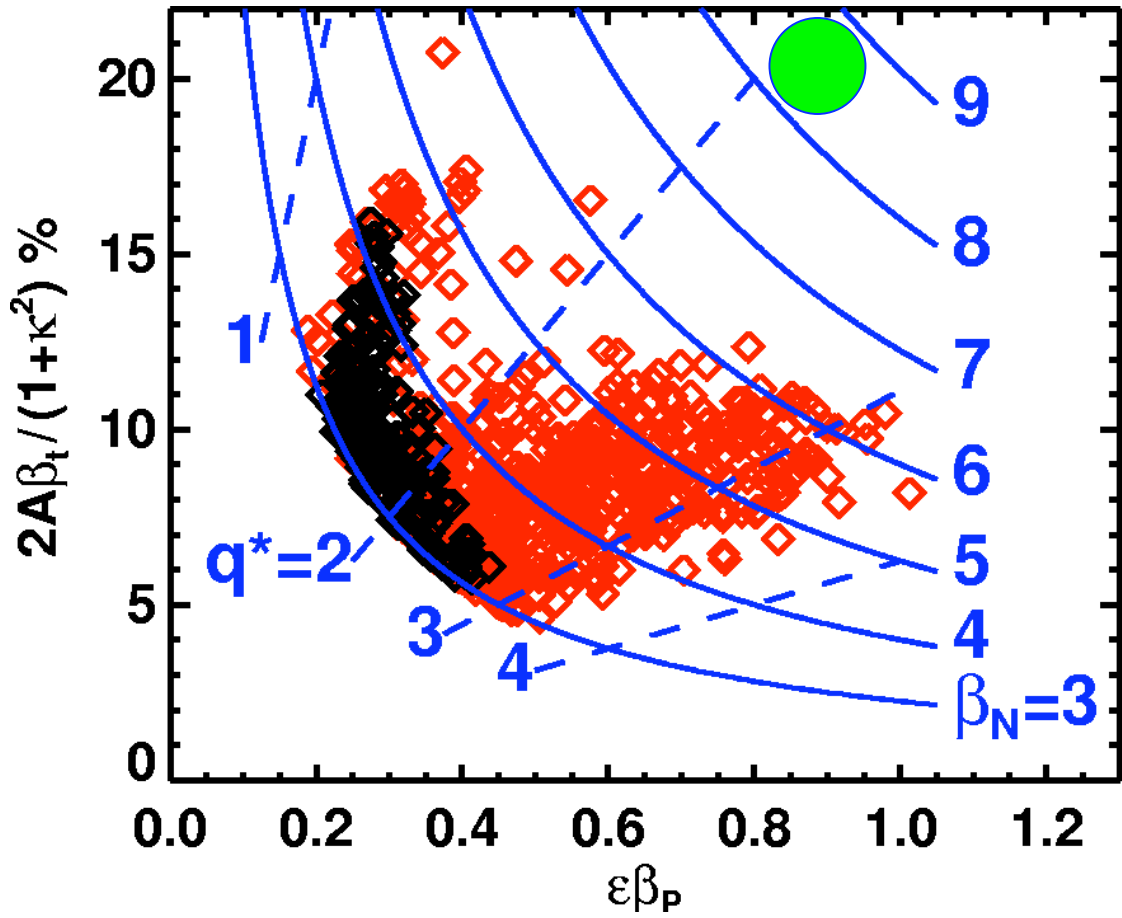


Fig. 1. Normalized plasma toroidal beta vs. normalized plasma poloidal beta. The black diamond is data from the 2001 run and the red (light color) diamonds are from the 2002 run. The normalized beta contours are as labeled. The target beta regime is shown as a large circle.

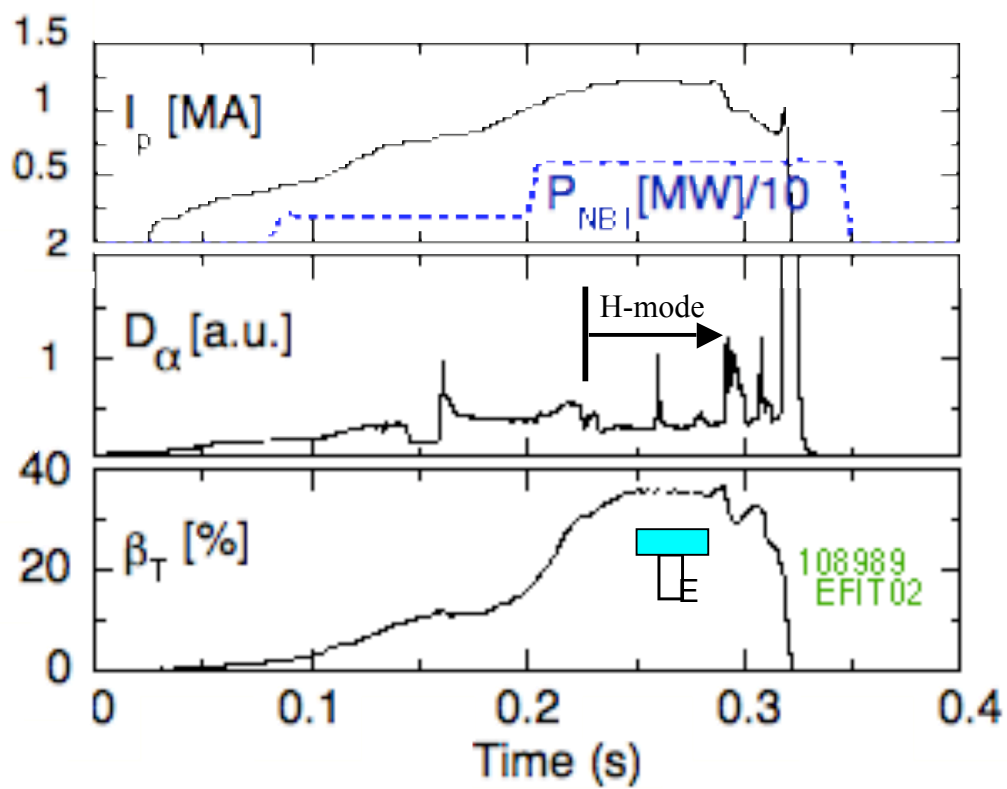


Fig. 2. The discharge evolution of the  $bT = 35\%$  discharge is shown.

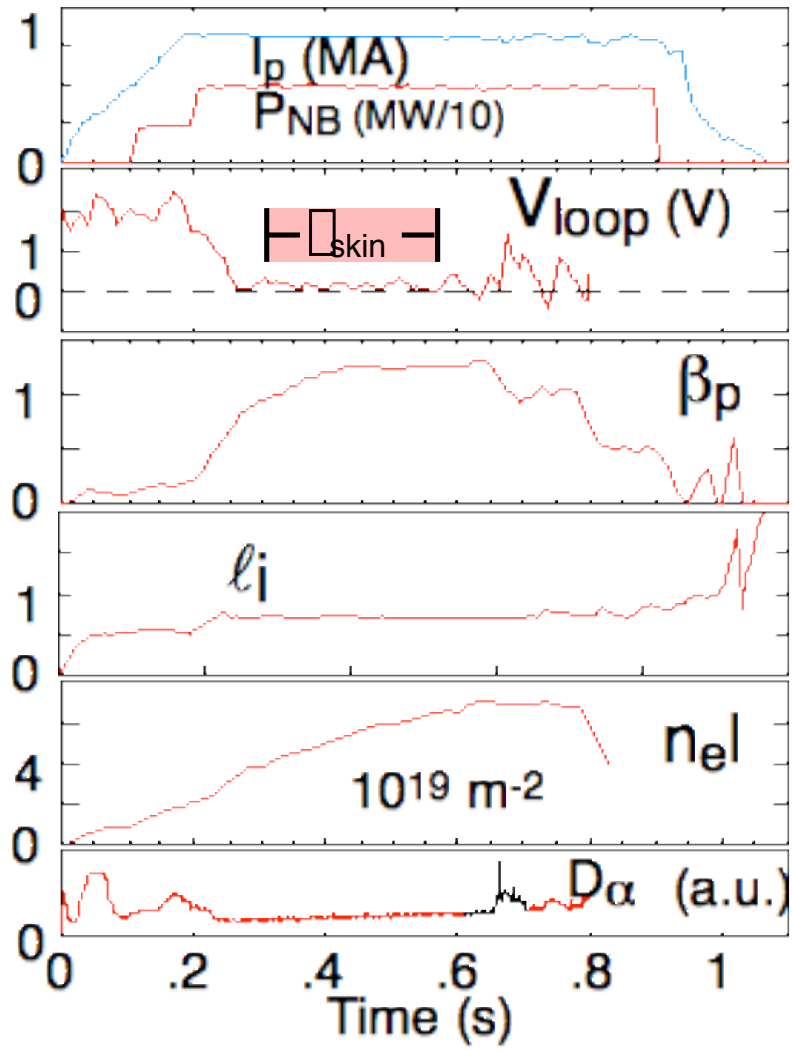


Fig. 3. The discharge evolution of high bp shot.

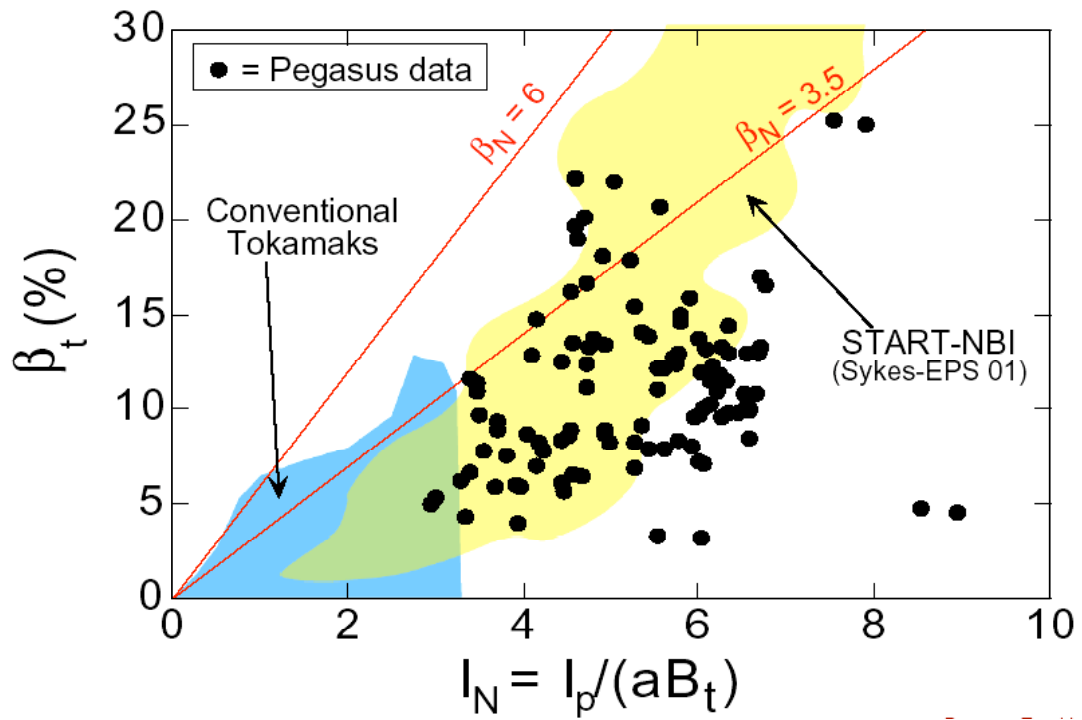


Fig. 4. Toroidal beta vs. normalized current for ohmically heated PEGASUS discharges.

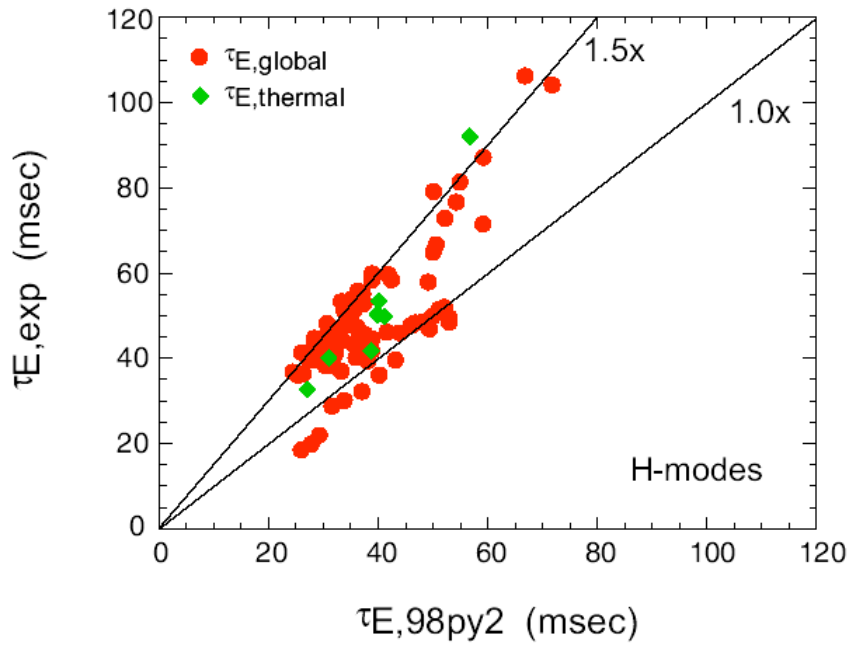


Fig. 5. NSTX H-mode experimental confinement data points are shown compared to the ITER-98-pby2 H-mode scaling. The circular (red) points are the global confinement time and the diamond (green) points are the confinement with energetic component and NBI lost components removed.

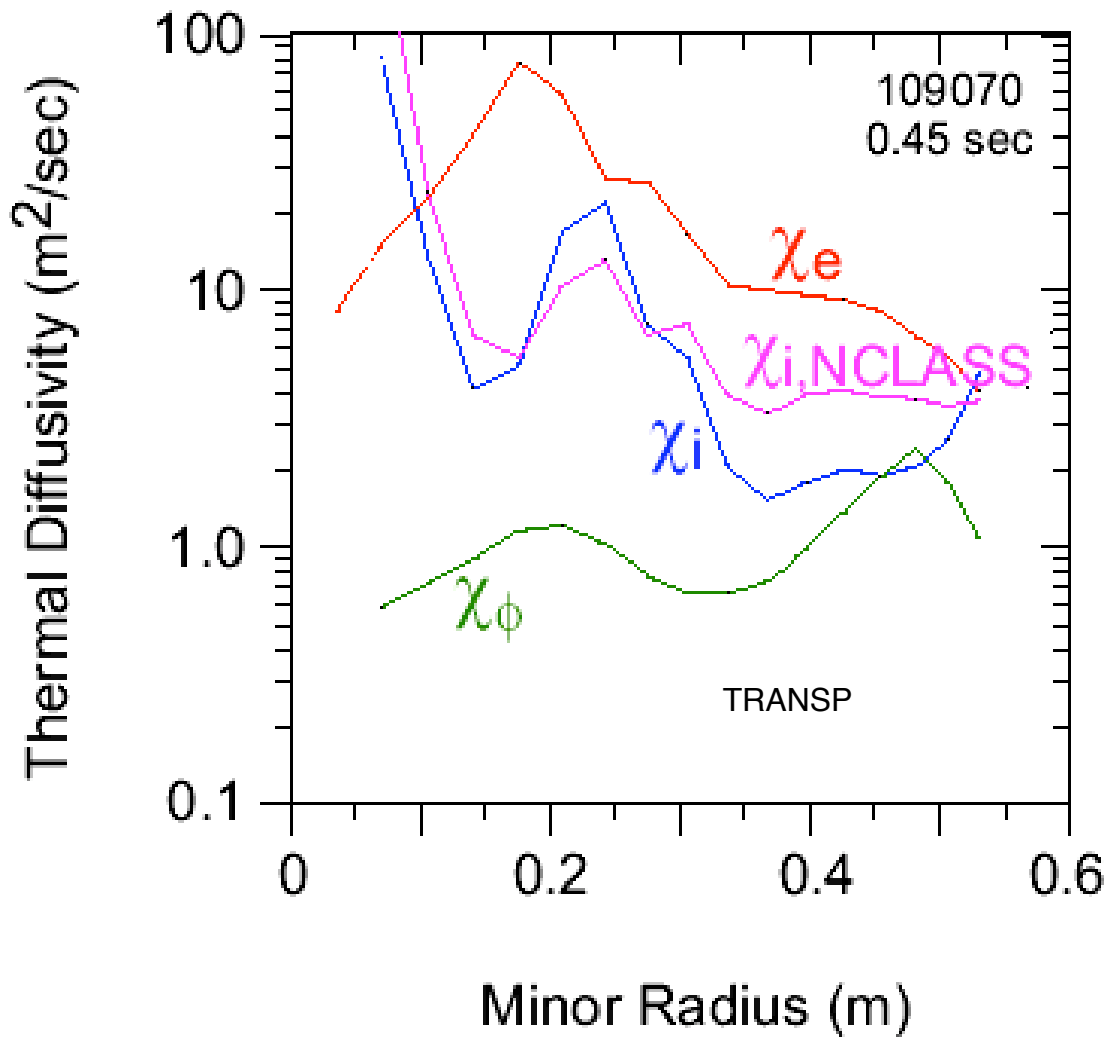


Fig. 6. Thermal and momentum diffusivities as labeled calculated from TRANSP power balance calculations. Shown for comparison is the calculated neoclassical thermal diffusivity from the NCLASS neoclassical model. The plasma radius is about 65 cm.

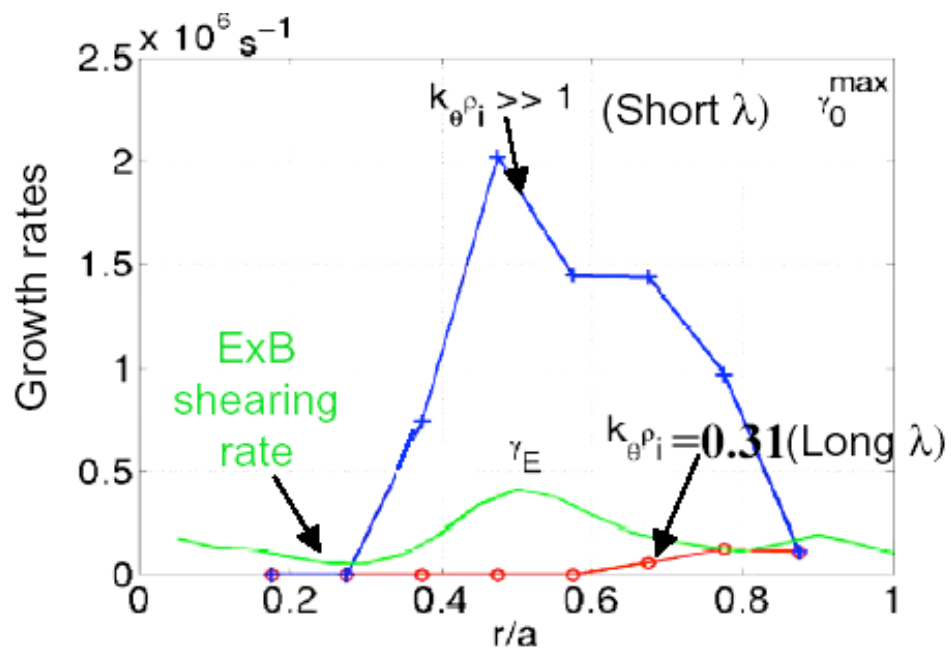


Fig. 7. Growth rates computed by GS2 show that the EXB shearing rate exceeds long wavelength modes thereby stabilizing them. The short wavelength modes on the other hand may dominate (electron) transport.



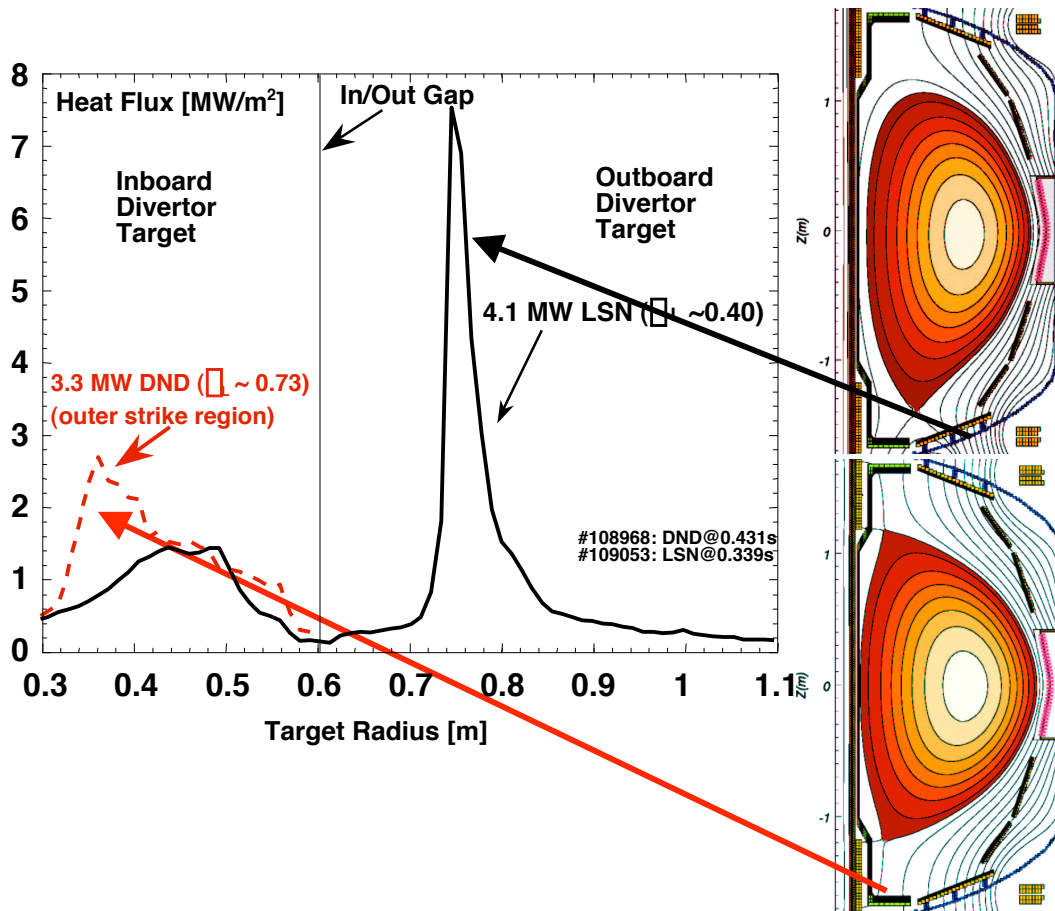


Fig. 8. Divertor heat load flux comparison for the single null and the high triangularity double null discharges.

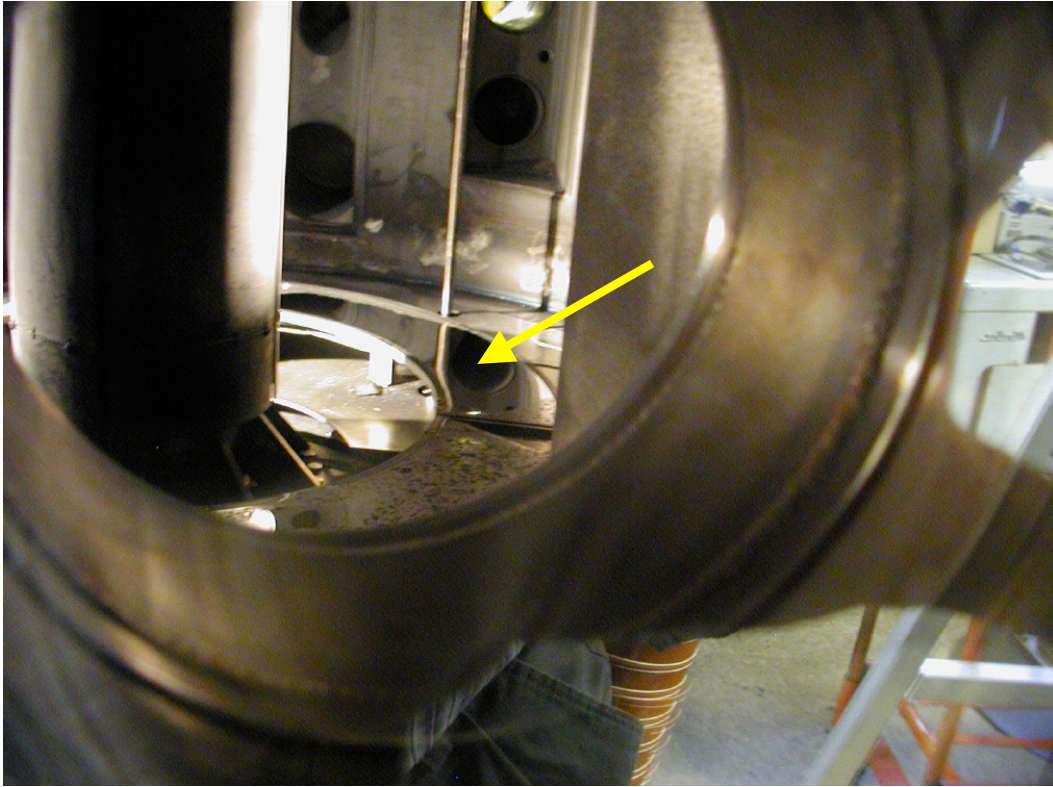


Figure 9. View of the lithium-filled toroidal tray in CDX-U through a port. The centerstack is the vertical column in the left side of the field of view. The tray is indicated by the arrow. Note the highly reflective surface, indicative of the liquid lithium in the tray.

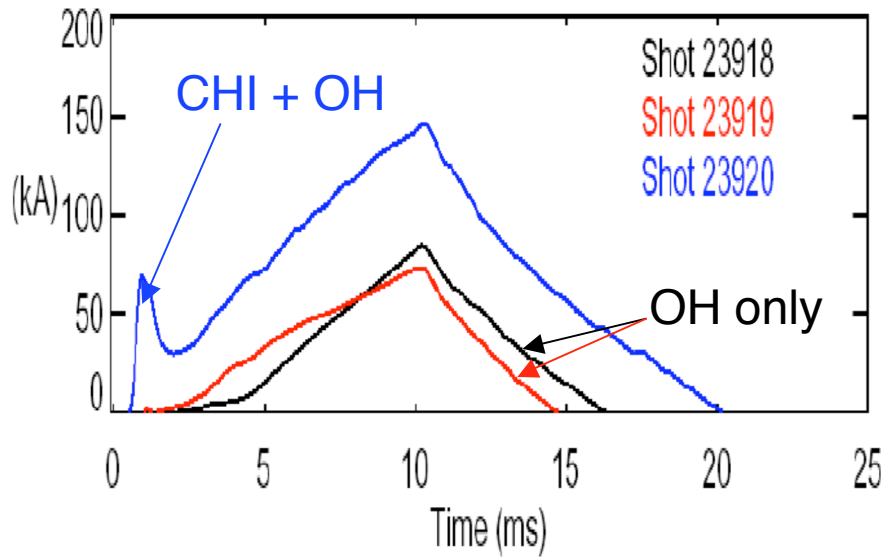
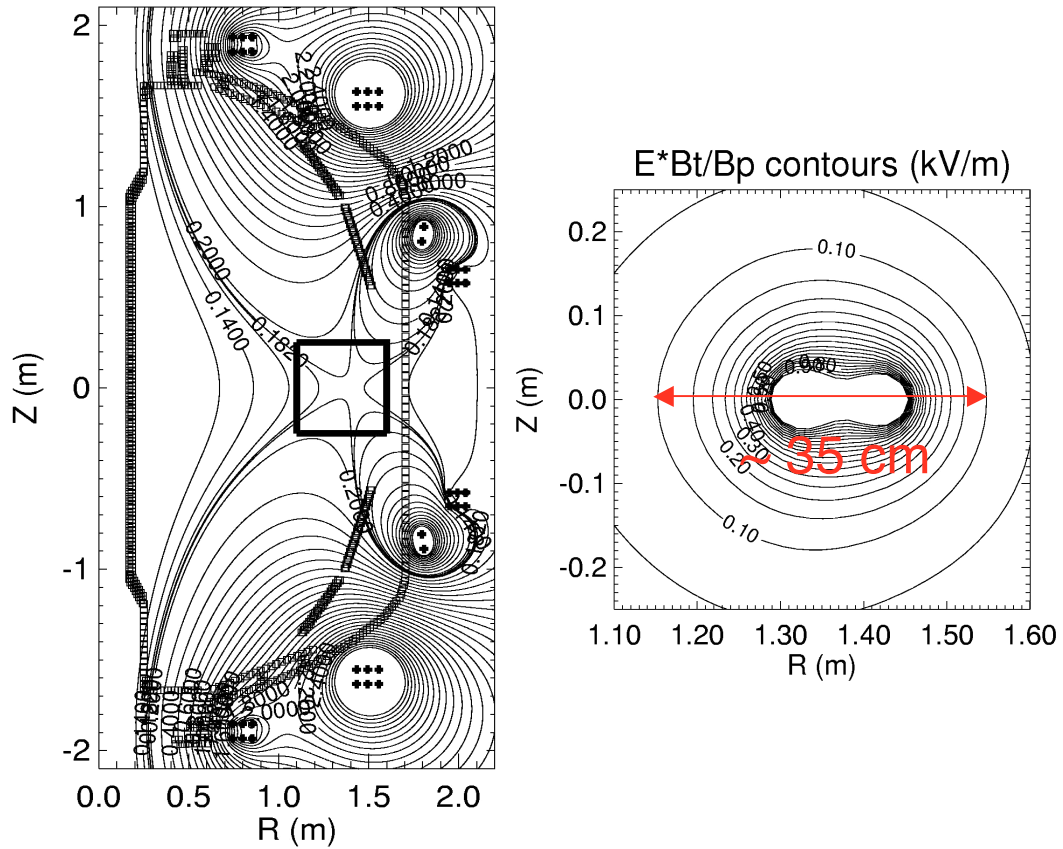


Fig. 10. Comparison of CHI + OH and OH only discharges as labeled. For all discharges, a constant inductive voltage of 4 V is applied for 2 ms, followed by 3.2 V for the next 6.8 msec.



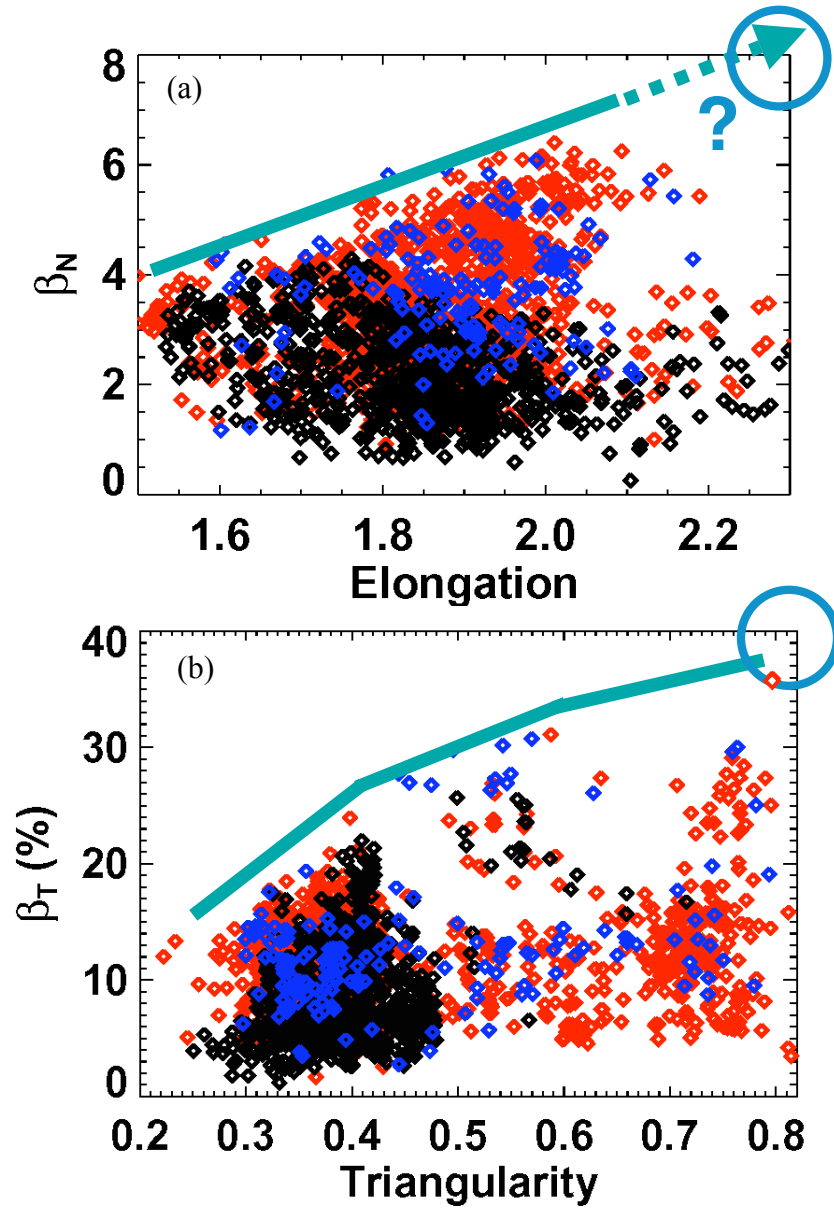


Fig. 12. Achieved plasma beta values vs. plasma shaping parameters. The black, red and blue diamonds are data from 2001, 2002, and 2003 campaign, respectively. (a)  $\beta_N$  vs. plasma elongation. (b)  $\beta_T$  vs. plasma triangularity.

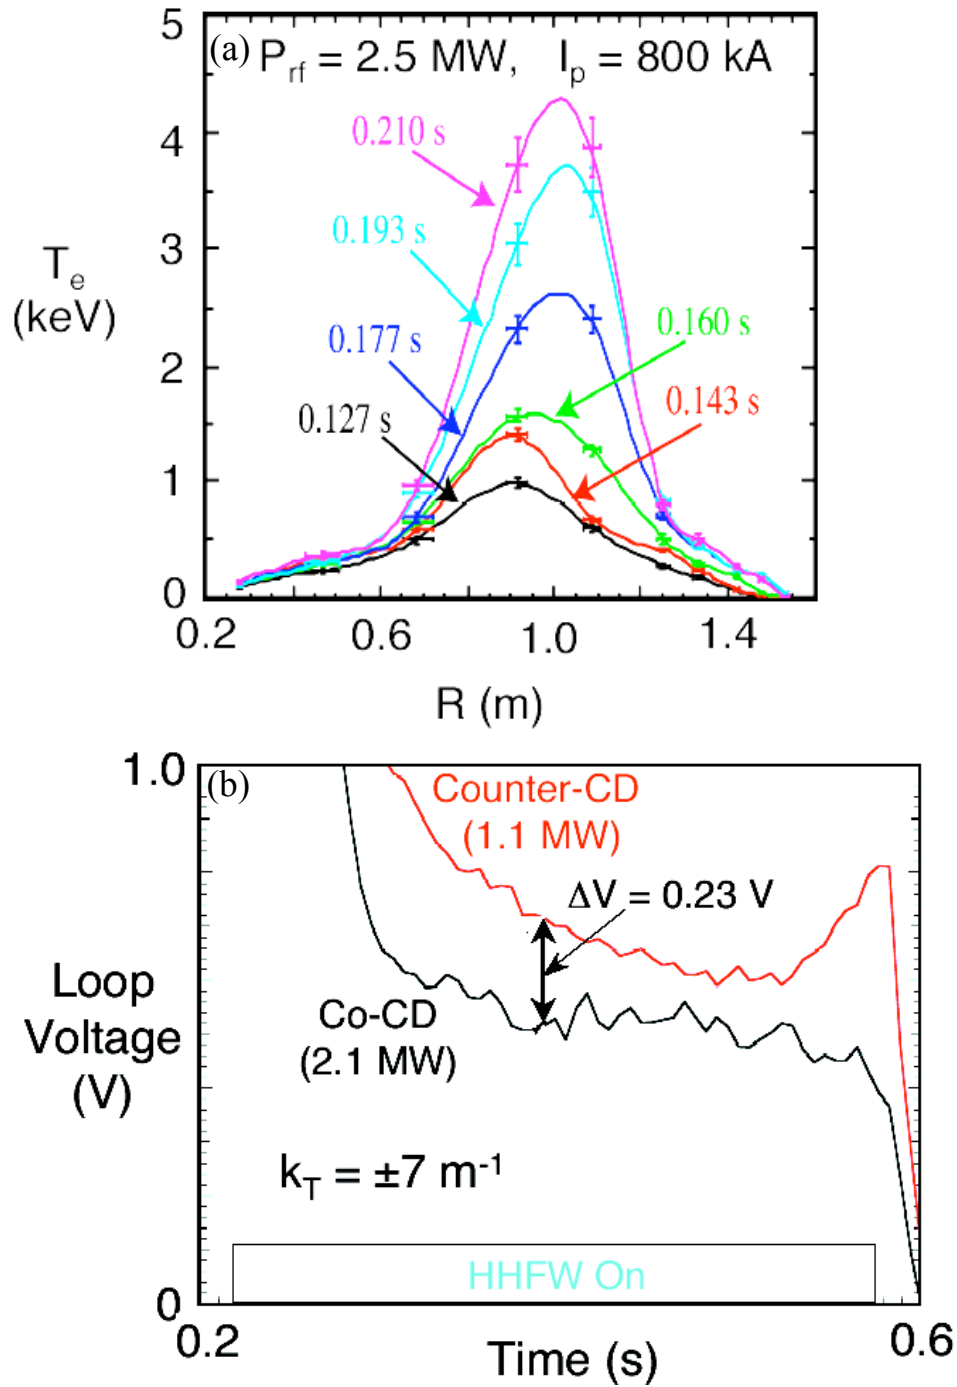


Fig. 13. High Harmonic Fast Wave Heating and Current Drive in NSTX. (a) Strong central heating by HHFW with creation of electron transport barrier. (b) Differences in  $V_{loop}$  with co and counter-directed waves indicate  $\sim 100 \text{ kA}$  of current drive consistent with theoretical modeling estimate.

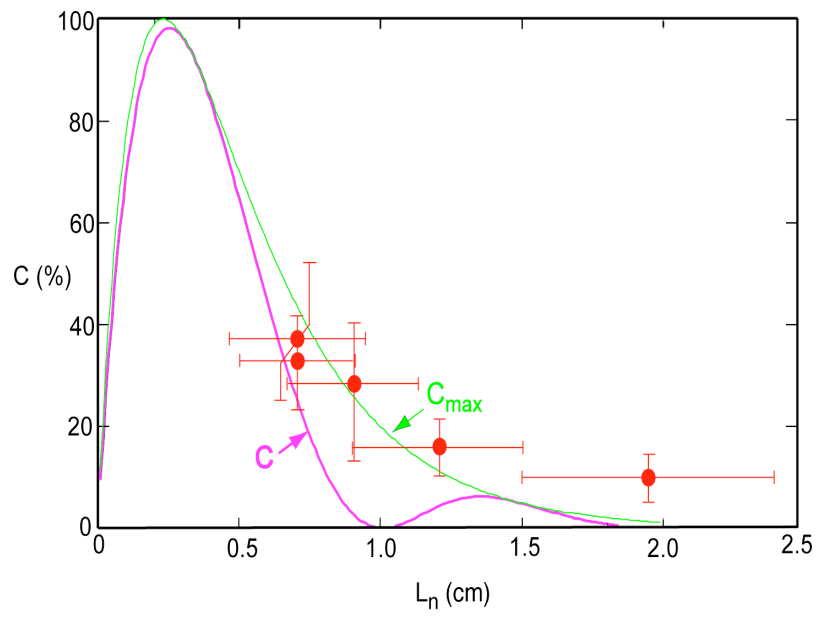


Fig. 14. Observed electron Bernstein wave emission coefficient in NSTX. The curves are theoretical values.

## External Distribution

Plasma Research Laboratory, Australian National University, Australia  
Professor I.R. Jones, Flinders University, Australia  
Professor João Canalle, Instituto de Fisica DEQ/IF - UERJ, Brazil  
Mr. Gerson O. Ludwig, Instituto Nacional de Pesquisas, Brazil  
Dr. P.H. Sakanaka, Instituto Fisica, Brazil  
The Librarian, Culham Laboratory, England  
Mrs. S.A. Hutchinson, JET Library, England  
Professor M.N. Bussac, Ecole Polytechnique, France  
Librarian, Max-Planck-Institut für Plasmaphysik, Germany  
Jolan Moldvai, Reports Library, Hungarian Academy of Sciences, Central Research Institute  
for Physics, Hungary  
Dr. P. Kaw, Institute for Plasma Research, India  
Ms. P.J. Pathak, Librarian, Institute for Plasma Research, India  
Ms. Clelia De Palo, Associazione EURATOM-ENEA, Italy  
Dr. G. Grosso, Instituto di Fisica del Plasma, Italy  
Librarian, Naka Fusion Research Establishment, JAERI, Japan  
Library, Laboratory for Complex Energy Processes, Institute for Advanced Study,  
Kyoto University, Japan  
Research Information Center, National Institute for Fusion Science, Japan  
Dr. O. Mitarai, Kyushu Tokai University, Japan  
Dr. Jiengang Li, Institute of Plasma Physics, Chinese Academy of Sciences,  
People's Republic of China  
Professor Yuping Huo, School of Physical Science and Technology, People's Republic of China  
Library, Academia Sinica, Institute of Plasma Physics, People's Republic of China  
Librarian, Institute of Physics, Chinese Academy of Sciences, People's Republic of China  
Dr. S. Mirnov, TRINITI, Troitsk, Russian Federation, Russia  
Dr. V.S. Strelkov, Kurchatov Institute, Russian Federation, Russia  
Professor Peter Lukac, Katedra Fyziky Plazmy MFF UK, Mlynska dolina F-2,  
Komenskeho Univerzita, SK-842 15 Bratislava, Slovakia  
Dr. G.S. Lee, Korea Basic Science Institute, South Korea  
Institute for Plasma Research, University of Maryland, USA  
Librarian, Fusion Energy Division, Oak Ridge National Laboratory, USA  
Librarian, Institute of Fusion Studies, University of Texas, USA  
Librarian, Magnetic Fusion Program, Lawrence Livermore National Laboratory, USA  
Library, General Atomics, USA  
Plasma Physics Group, Fusion Energy Research Program, University of California  
at San Diego, USA  
Plasma Physics Library, Columbia University, USA  
Alkesh Punjabi, Center for Fusion Research and Training, Hampton University, USA  
Dr. W.M. Stacey, Fusion Research Center, Georgia Institute of Technology, USA  
Dr. John Willis, U.S. Department of Energy, Office of Fusion Energy Sciences, USA  
Mr. Paul H. Wright, Indianapolis, Indiana, USA



The Princeton Plasma Physics Laboratory is operated  
by Princeton University under contract  
with the U.S. Department of Energy.

Information Services  
Princeton Plasma Physics Laboratory  
P.O. Box 451  
Princeton, NJ 08543

Phone: 609-243-2750  
Fax: 609-243-2751  
e-mail: [pppl\\_info@pppl.gov](mailto:pppl_info@pppl.gov)  
Internet Address: <http://www.pppl.gov>