PPPL-3161 - Preprint Date: February 1996, UC-420, 426, 427

Global Stability Study of the Ultra Low Aspect Ratio Tokamak, ULART

M. Yamada[1], A. Morita[2], N. Pomphrey[1], Y. Ono[2], and M. Katsurai[2]

[1]Plasma Physics Laboratory, Princeton University, Princeton, NJ, 08543, USA,
[2]Dept. of Electrical Engineering, University of Tokyo, Tokyo, 113, Japan

ABSTRACT

By introducing a slender current carrying conductor through the geometric center axis of the Tokyo University TS-3 device, we have generated ultra low aspect ratio tokamak(ULART) configurations with aspect ratio as low as 1.05. In this extreme limit we study the transition of the spheromak ($q_{edge} = 0$, $I_{tf}=0$) to a ULART plasma ($q_{edge} = 2\text{-}20$). We investigate the global MHD characteristics of ULART by comparing theoretical results with the experimental data obtained. A small current in the center conductor (compared with the plasma current) is found to significantly improve the overall MHD stability characteristics of the formed plasmas by effectively stabilizing the global tilt/shift mode. Theoretical calculations of the threshold toroidal field current required for stability and the growth rates of the tilt/shift modes agree well with the TS-3 data.

1. Introduction

In recent years, low-aspect-ratio tokamak configurations have been the subject of intensive study in the search for a cost-effective, high-performance plasma regime which can lead to compact volumetric neutron sources as well as high beta advanced fuel reactors[1-4]. They can confine high beta plasmas with large natural elongation in the first stability regime. Recent results from START[2] have shown that confinement properties of low aspect ratio tokamaks (A=R/a < 2) can be as good as conventional tokamaks with aspect ratio of 3-4. To extend the parameter range of the low-aspect-ratio tokamak regime, the construction of a class of 1 MA level devices is being considered[3]. The present work describes the exploration, both experimental and theoretical, of global MHD characteristics of tokamak plasmas in the ultra low aspect ratio-tokamak (ULART) regime with aspect ratio A ≈ 1.05-1.5. Tokamaks in this regime can manifest the highest advantages of low aspect ratio tokamaks for MHD stability and compact reactor design.

The ULART configuration[4] is similar to the spheromak[5] in its strong paramagnetism and magnetic helical pitch. As the aspect ratio and plasma configuration approach this extreme limit, the features of the magnetic well (average minimum B), the shear, and their effects on the plasma's MHD stability should significantly deviate from those of standard tokamaks and the MHD characteristics are expected to change dramatically. By introducing a slender current carrying conductor through the geometric center axis of the Tokyo University TS-3 device, we have generated ULART plasmas with aspect ratio as low as 1.05. We study the global MHD stability characteristics of ULART by comparing theoretical results with data obtained in the TS-3 device.

The most significant contributions of this paper are; 1) it is found both theoretically and experimentally that a small current in the center conductor ($I_{tf} < I_p$) significantly improves the global MHD stability characteristics of the ULART by effectively stabilizing the global tilt/shift mode, and 2) theoretical

estimates for the threshold toroidal field current(I_{tf}) and the growth rates of the n=1 (n= toroidal mode number) global modes agree well the TS-3 data.

2. Characteristics of ultra low aspect ratio takamak(ULART) equlibria.

MHD equilibrium calculations show that ULART plasmas with edge safety factor of q(a) > 3 (q is the inverse of the rotational transform of the field lines) are characterized by high maximum toroidal beta, low poloidal beta, high natural elongation, strong paramagnetism, and a small ratio of toroidal-field-coil current to plasma current. Fig.1 shows flux plots and profiles of toroidal and poloidal magnetic fields for tokamak equilibria in the low aspect ratio regime. The paramagnetism is seen to increase as the aspect ratio decreases. In the ultra-low aspect ratio limit, the field line pitch resembles that of a spheromak in the outer radial edge of the plasma, but the large toroidal field component in the inner radial edge makes the pitch resemble that of a tokamak. The global stability of a ULART is determined by the magnetic well depth (not always present) and the shear of the configuration.

The required toroidal field coil current, I_{tf}, for typical ULART equilibria has been estimated[6,7] as $I_{tf} / I_p = 2\, q(a)\, (\pi\, a / 2b)^2\, (A -1)^2$, where I_p is the plasma current, 2b the vertical length of the plasma, 'a' the minor radius, R_p the major radius, and $A = R_p/a$ is the aspect ratio. It should be noted from this simple scaling that a ULART requires substantially smaller toroidal field current than conventional tokamaks, and that the ratio (I_{tf} / I_p) can be as small as 0.1 for an ultra low aspect ratio tokamak with A=1.1 and q(a)=3.

A spheromak configuration which confines low-aspect-ratio toroidal plasma without requiring a linked toroidal coil structure can offer many reactor advantages[5]. But a serious drawback of the spheromak configuration is its susceptibility to global n=1 tilt/shift instabilities (n = toroidal mode number) in the absence of near-by conductors. The radial displacement eigenfunctions of these modes, $\xi = \Sigma_m\, \xi_m\, e^{\,i(m\theta - n\phi)}$, are made primarily of a

superposition of n=1, m = ± 1 modes (m= poloidal mode number) of equal/opposite amplitude and opposite/equal phase, respectively. Insertion of a thin passive center conductor is found to be ineffective in stabilizing the tilt/shift modes because the image currents generated are small. However, by driving a current through a thin center conductor, thereby generating an external toroidal field, the spheromak can be converted into a ULART, as demonstrated by Bruhns et al.[8]. The stability of ULART configurations with A~1 and small applied external toroidal field is expected to be related to the stability of spheromaks. In particular, for small enough toroidal field current I_{tf}, remnants of the tilt and shift instabilities will exist. As I_{tf} is increased relative to the plasma current, the tokamak edge safety factor is increased and the eigenfunctions of the unstable modes change continuously into n=1, m=nq(a) free boundary modes. For sufficiently high q(a), the increased shear near the plasma edge completely stabilizes the external kink mode.

3. Stability analysis of tilt/shift modes for ULART

As I_{tf} is increased relative to the plasma current, the toroidal field pressure which increases sharply near the geometric axix is expected to provide a strong stabilizing force againt tilt or shift motion. The question then arises; what amount of external toroidal field is necessary to stabilize all global n=1 modes in ULART configurations?

To address this issue, we have carried out three different calculations, each of which assumes that the n=1 modes are rigid. In the first method, presented below, the stability criteria are estimated by approximating the plasma as a rigid low-aspect-ratio toroidal ring[5,9] with rectangular cross-section and calculating the tilt and shift moments due to surface currents induced on the inner edge of the displaced plasma, as shown in Fig. 2. This method, which provides simple analytical expressions for the stability criteria and the growth rates for the tilt/shift modes, has been verified by another more elaborate

calculation that takes into account the return passes of the induced surface current.[14] The third method, which will be reported in detail elsewhere[10], is an extension of Rebhan's work[11]. Using the energy principle, restricted to rigid plasma displacements, "sufficient" conditions for stability are obtained for a Solovev class of analytic equilibria by demanding positivity of the plasma energy. The agreement between the three different calculation in required values of I_{tf} / I_p for tilt/shift stabilization is excellent (better than 30 %). Below, we present the simplest of these calculations, and compare its predictions with TS-3 experimental data.

The stabilizing tilt moment is calculated from the poloidal force balance and from the toroidal pressure on the inner surface of an elongated low aspect-ratio toroidal plasma[9]. For a tilt angle θ with respect to the horizontal plane[Fig.2b], the tilt moment due to the force on the plasma from the equilibrum field is

$$M_p = 2 I_p (\theta B_z - B_R) R_p^2 \int_{-\pi/2}^{\pi/2} cos^2 \varphi d\varphi = \pi R_p^2 I_p (\theta B_z - B_R) \quad (1),$$

where I_p, B_Z,B_R, and R_p are the toroidal plasma current, axial and radial equilibrium fields, and the major radius of the plasma, respectively; toroidal angle is depicted by φ.

Using the relationships $B_z = \frac{\mu_o I_p}{4\pi R_p} C_L$ and $B_R = n^* \cdot \theta \cdot B_z$, we obtain

$$M_p = \frac{\mu_o I_p^2}{4}\left(1 - n^*\right)\theta \cdot R_p \cdot C_L \quad (2)$$

Here, $n^* = -(R/B_Z)(\partial B_Z/\partial R)$ denotes the vertical field index at the magnetic axis, and C_L is a coefficient (~ 1) which determines the self-inductance of a rectangular cross-section plasma ring[12] with half height b, minor radius a, and major radius R_p. In the large aspect ratio limit for circular cross section rings, $C_L \Rightarrow ln\frac{8R_p}{a} - 1$.

The external toroidal field, which increases sharply at the inner edge(near the geometric axis) of a ULART, provides a strong stabilizing (pressure) force against tilt motion. The stabilizing moment due to the inner toroidal field B_{tf} is

$$M_{tf} = -2\frac{B_{tf}^2}{\mu_o}\cdot\theta\pi b\int_o^b y^2\cdot dy = -\frac{2\pi b^3}{3\mu_o}B_{tf}^2\theta, \qquad (3)$$

where B_{tf} can be expressed in terms of the center toroidal field coil (radius~ R_{tf})current I_{tf} by $B_{tf} = \frac{\mu_o I_{tf}}{2\pi R_{tf}}$.

From eq(2) and (3) the total tilt moment M_{tilt} is

$$M_{tilt} = \frac{\mu_o I_p^2}{4}\theta R_p\left[\left(1-n^*\right)C_L - \frac{2}{3\pi}\left(\frac{I_{tf}}{I_p}\right)^2\left(\frac{\kappa}{A-1}\right)^2\left(\frac{\kappa}{A}\right)\right] \qquad (4),$$

where A and κ(=b/a) are the aspect ratio and elongation of the rectangular cross-section toroidal ring. The first term in the big bracket is the contribution from the poloidal field, and the second stabilizing term is due to the toroidal field. The external toroidal field, which increases sharply at the inner edge, provides a strong stabilizing (pressure) force against tilt or shift motion. This is clearly seen in the second term of Eq.(4) which depends on $1/(A-1)^2$. It follows from Eq.(4) that the stability condition for the tilt mode is

$$\frac{I_{tf}}{I_p} \geq \left[\frac{3}{2}\pi\left(1-n^*\right)C_L A\right]^{1/2} \cdot \frac{A-1}{\kappa^{3/2}} \qquad (5).$$

The growth rate of the tilt mode can be straightforwardly derived by writing an equation of motion for the tilt[5]. It is found that

$$\gamma_{tilt} \approx \frac{1}{2}\frac{V_A^p}{R_p} A\left[\frac{2\pi(1-n^*)C_L}{\kappa}\right]^{1/2}\left(1-\frac{I_{tf}^2}{I_{crit}^2}\right)^{\frac{1}{2}} \qquad (6)$$

where $I_{crit} = I_p\{\text{RHS of eq.(2)}\}$, and $v_A^p = \sqrt{\frac{B_p^2}{\mu_0 \rho}}$ is the Alfven velocity for the average poloidal field.

In a similar way, the threshold toroidal field current for stabilizing shift modes and the growth rate of the shift instability can be calculated as

$$\frac{I_{tf}}{I_p} \geq \left[\frac{\pi}{2} n^* C_L\right]^{1/2} \cdot \frac{A-1}{\sqrt{A\kappa}} \qquad (7),$$

$$\gamma_{shift} = \frac{1}{2}\frac{V_A^p}{R_p} A\left[\frac{2\pi n^* C_L}{\kappa}\right]^{1/2}\left(1-\frac{I_{tf}^2}{I_{crit}^2}\right)^{\frac{1}{2}} \qquad (8).$$

The effectiveness of the central toroidal field current for stabilizing tilt and shift modes is readily seen in these expressions: A small axial current ($I_{tf} << I_p$) in the center conductor can stabilize both modes when A approaches unity. We note that the condition of q(a) >1 is not a deciding factor for suppressing tilt/shift modes. The stability criteria expressed in terms of I_{tf}/I_p in eq(5) and eq(7) translate to q(a) = 2-4 for aspect ratio of A=1.6-1.1.

4. Experimental Results

An experimental investigation of merging spheromaks and low aspect ratio tokamaks has been carried out in the TS-3 device[13-15] By introducing a slender current-carrying conductor assembly ($R_{tf} \geq 1$ cm) through the geometric center axis of this device, ULART configurations have been generated with extremely low aspect ratio of 1.05-1.6. In this extreme limit the transition of the spheromak (q(a) = 0, I_{tf}=0) to a ULART plasma (q(a) = 2-20) has been investigated experimentally. The plasma current is in the range of 25 kA-35 kA with variable toroidal field of 0-1 kG for R_p=18 cm, $a \leq$ 16 cm. The evolution of the current and magnetic field profiles [q(R), B(R), Ψ(R)] are monitored by an array of magnetic probes inserted into the plasma. Fig.3 presents the basic geometry of the present experiment.

Experiments were performed to examine the effectiveness of the central toroidal field current in suppressing tilt, shift and other n=1 kink modes. Decreasing the aspect ratio while keeping $I_p \sim$ 30 kA ~const, it was observed that a decreasingly small I_{tf} is required to stabilize the n=1 modes. The threshold value of I_{tf} for n=1 global stability decreases substantially from about 30 kA to 6 kA as A is reduced from 1.6 to 1.1. Magnetic field measurements show that the threshold conditions correspond to q = 2 - 3 at the plasma edge. In Fig.4, the threshold currents expressed as a ratio of the plasma current, are plotted as a function of aspect ratio A and compared with our calculations based on rigid instability. The plasma shape, determined by flux measurements in the TS-3 experiments[14], corresponds to κ = 1.6. Our calculations (both analytical and numerical) which predict $I_{tf} \geq 0.2\ I_p$ are in good agreement with the experimental results.

A conventional large aspect ratio theory applied to the ULART, would yield the threshold value for tilt mode stability[7,14] of $q_{cyl}(a) = aB_t/R_pB_p \sim 1$ (where $q_{cyl}(a)$ denotes cyclindrical q value) or $I_{tf} \geq I_p$. But our calculation and

experiment have demonstrated that notably smaller I_{tf} is required for n=1 tilt/shift global stability. In Fig. 4, the stable regime is shown to be $I_{tf} \geq 0.2\ I_p$ for A=1.1.

Figure 5 depicts the growth rate of n=1 modes due to tilt/shift or kink modes versus toroidal field coil currents at the center conductor for 3 different aspect ratios. It is observed that the growth rates of n=1 modes decrease dramatically as the toroidal field coil current is raised or q increases, as predicted by the above theory. The excellent agreement between the data and the rigid conductor model suggests that the ULART is robust against global MHD instabilities.

5. Summary

By introducing a slender current carrying conductor through the geometric center axis of the Tokyo University TS-3 device, ultra low aspect ratio tokamak(ULART) configurations have been generated with aspect ratio as low as 1.05. The ULART configuration is found to be similar to the spheromak in its strong paramagnetism and magnetic helical pitch. As the aspect ratio and plasma configuration approach the extreme limit of A~1, features of the magnetic configuration significantly deviate from those of standard tokamaks.

The most significant findings are; 1) it is found both theoretically and experimentally that a small current in the center conductor ($I_{tf} < I_p$) significantly improves the global MHD stability characteristics of the ULART by effectively stabilizing the global tilt/shift mode, and 2) theoretical estimates for the threshold toroidal field current(I_{tf}) and the growth rates of the tilt and shift modes agree well the TS-3 data.

Another finding is that the condition of q(a) >1 is not a deciding factor for suppressing n=1/m=1 tilt/shift modes. Our simple analytical result expressed in terms of I_{tf}/I_p is translated to q(a) = 2-4 for the range of aspect ratio studied[A=1.6-1.1]. This result is in good agreement with the experimental data in

which the measured threshold conditions correspond to q(a) = 2 - 3. Numerical calculations[10] based on the PEST II stability code show that the growth rate of n=1 modes for a ULART with A=1.1 decreases notably as $q_\psi(a)$ increases beyond 3. The present result from the ULART experiment on TS-3 may be related to the CDX result in which a significant enhancement of m=1-2/n=1 MHD modes is observed as the q(a) is decreased[7]. We expect a coupling of low-n internal modes with external modes. A further extensive investigation with the aid of MHD numerical stability codes will clarify this important issue and reveal more unique MHD characteristics of the ULART configuration[10].

Acknowledgement

Valuable discussions with Drs. M. Peng, J. Manickam, M. Ono and S. Yoshikawa are highly appreciated. This work was supported by DoE contract No. DE-AC02-76-CHO-3073 and Mombusho of Japan.

REFERENCES

[1] Peng Y-K. M., and Strickler D. J., Nucl. Fusion **26**, 769 (1986).

[2] Peng Y-K. M., and Hicks J.B., Fusion Tech. **21**, 1729 (1992).

[3] Sykes A.. et al., Plasma Phys. and Contr. Fusion **35**, 1051 (1993).

[4] Ono M., Goldston R., Kaye S., et al., Bull. Am. Phys. Soc. **40**, 1655 (1995).

[5] Yamada M., Proc. Int. Workshop on Mirror-based Field-Reversed Approaches to Magnetic Fusion, Varenna, Italy, **3**, 463 (1983) and references therein.

[6] Katsurai M., Morita A., Ono Y., et. al., Plasma Workshop IEE Japan EP-94-53 (1994).

[7] Hwang Y.S., Yamada M., Jones, T., Ono M., et al., Proc. 15 th IAEA Int. Conf. Plasma Phys. Contr. Fusion. IAEA-CN-60-A5-II-6 , Seville, Spain (1994).

[8] Bruhns, H., Brendel R., Raupp G., and Steiger J., Nucl. Fusion **27**, 2178 (1987); Browning, P.K., et al. Phys. Rev. Letts. **68**, 1722, (1992); Nelson B.A., Jarboe T., et al. Phys. Rev. Letts. **72**, 1722 (1994).

[9] Yamada M., Pomphrey N., Morita A.,et al., Proc. 6th Int. Toki Conf. Plasma

Phys. and Contr. Nucl. Fusion; Trans. Fusion Tech. 2**7**, 161 (1995)

[10] Pomphrey N.,et al. to be published.

[11] Rebhan E., Nucl. Fusion **15**, 277 (1975)

[12] Lyle T.R., Phils. Trans. **213**, 421 (1914)

[13] Ono Y., Akao T., Katsurai M., and Yamada M., Phys. Fluids **B5**, 3691(1993).

[14] Morita A., et al. to be published

[15] Katsurai M., Proc. 6th Int. Toki Conf. Plasma Phys. and Contr. Nucl. Fusion; Trans. Fusion Tech. **27**, 97 (1995)

Figure Captions

Fig. 1 Comparison of magnetic field profiles for tokamak equilibria with decreasing aspect ratio. The plasma current, edge and central q values are held constant at the values Ip = 35 kA and q(a) = 3.0, and q(0)= 0.6, respectively.

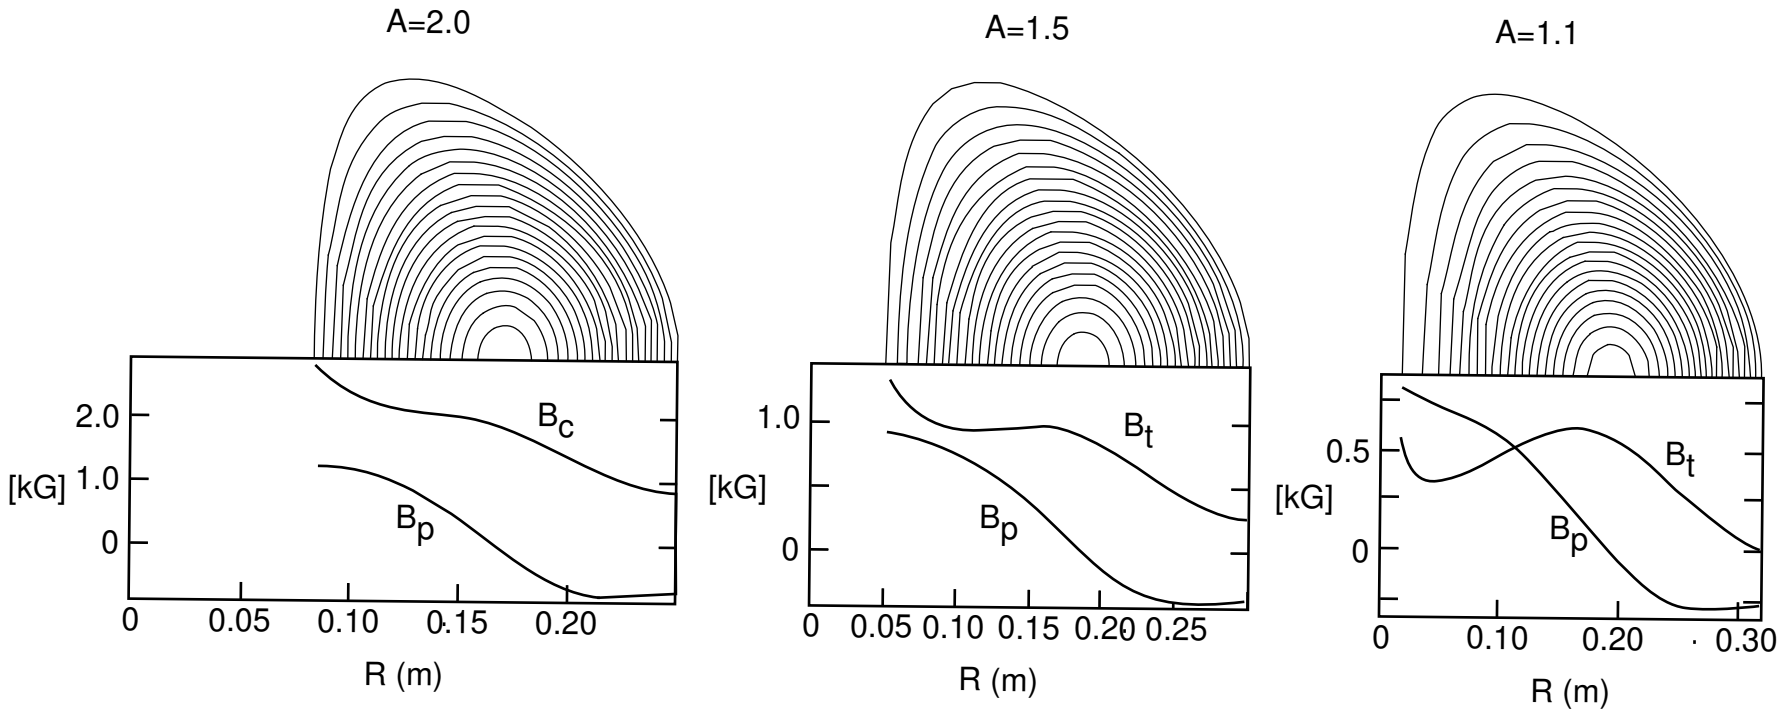

Fig. 1

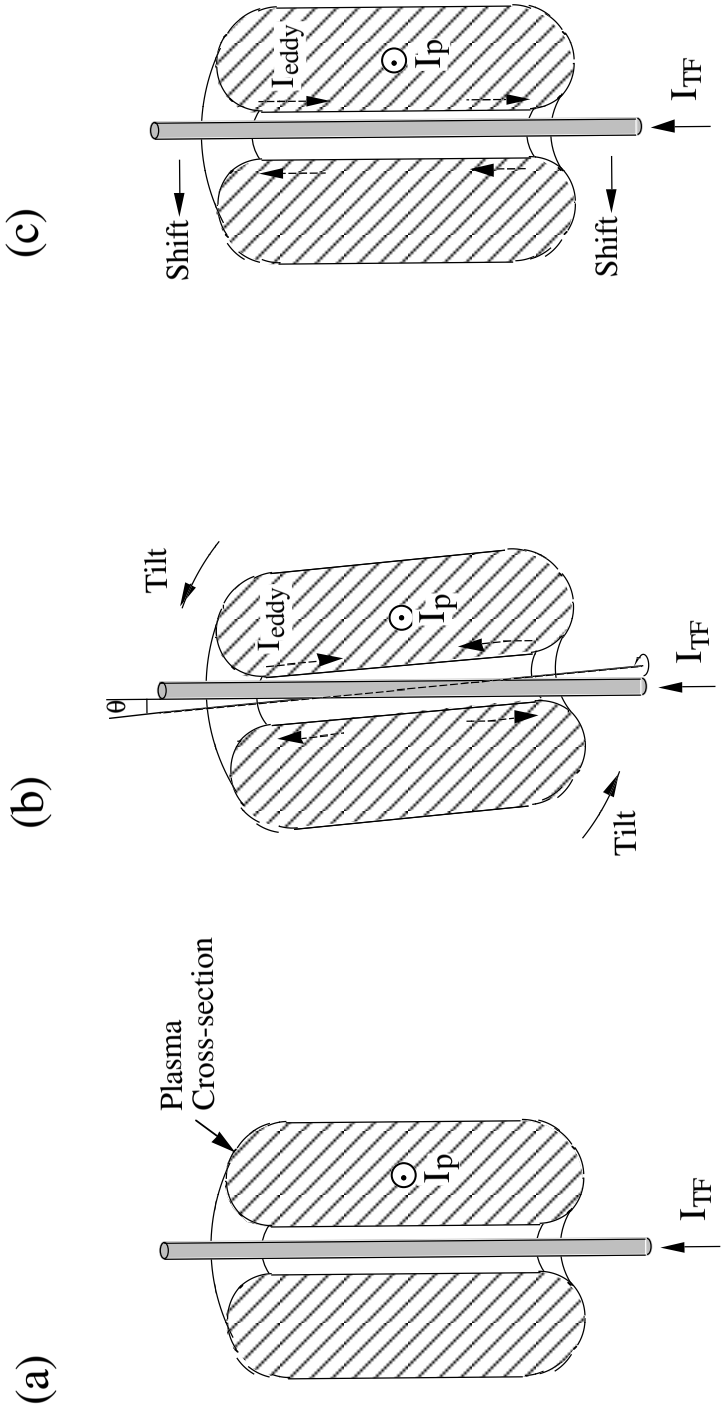
(a)
Plasma
Cross-section
I_p
I_{TF}
(b)
Tilt
I_{eddy}
I_p
I_{TF}
θ
Tilt
(c)
I_{eddy}
I_p
I_{TF}
Shift
Shift

Fig. 2

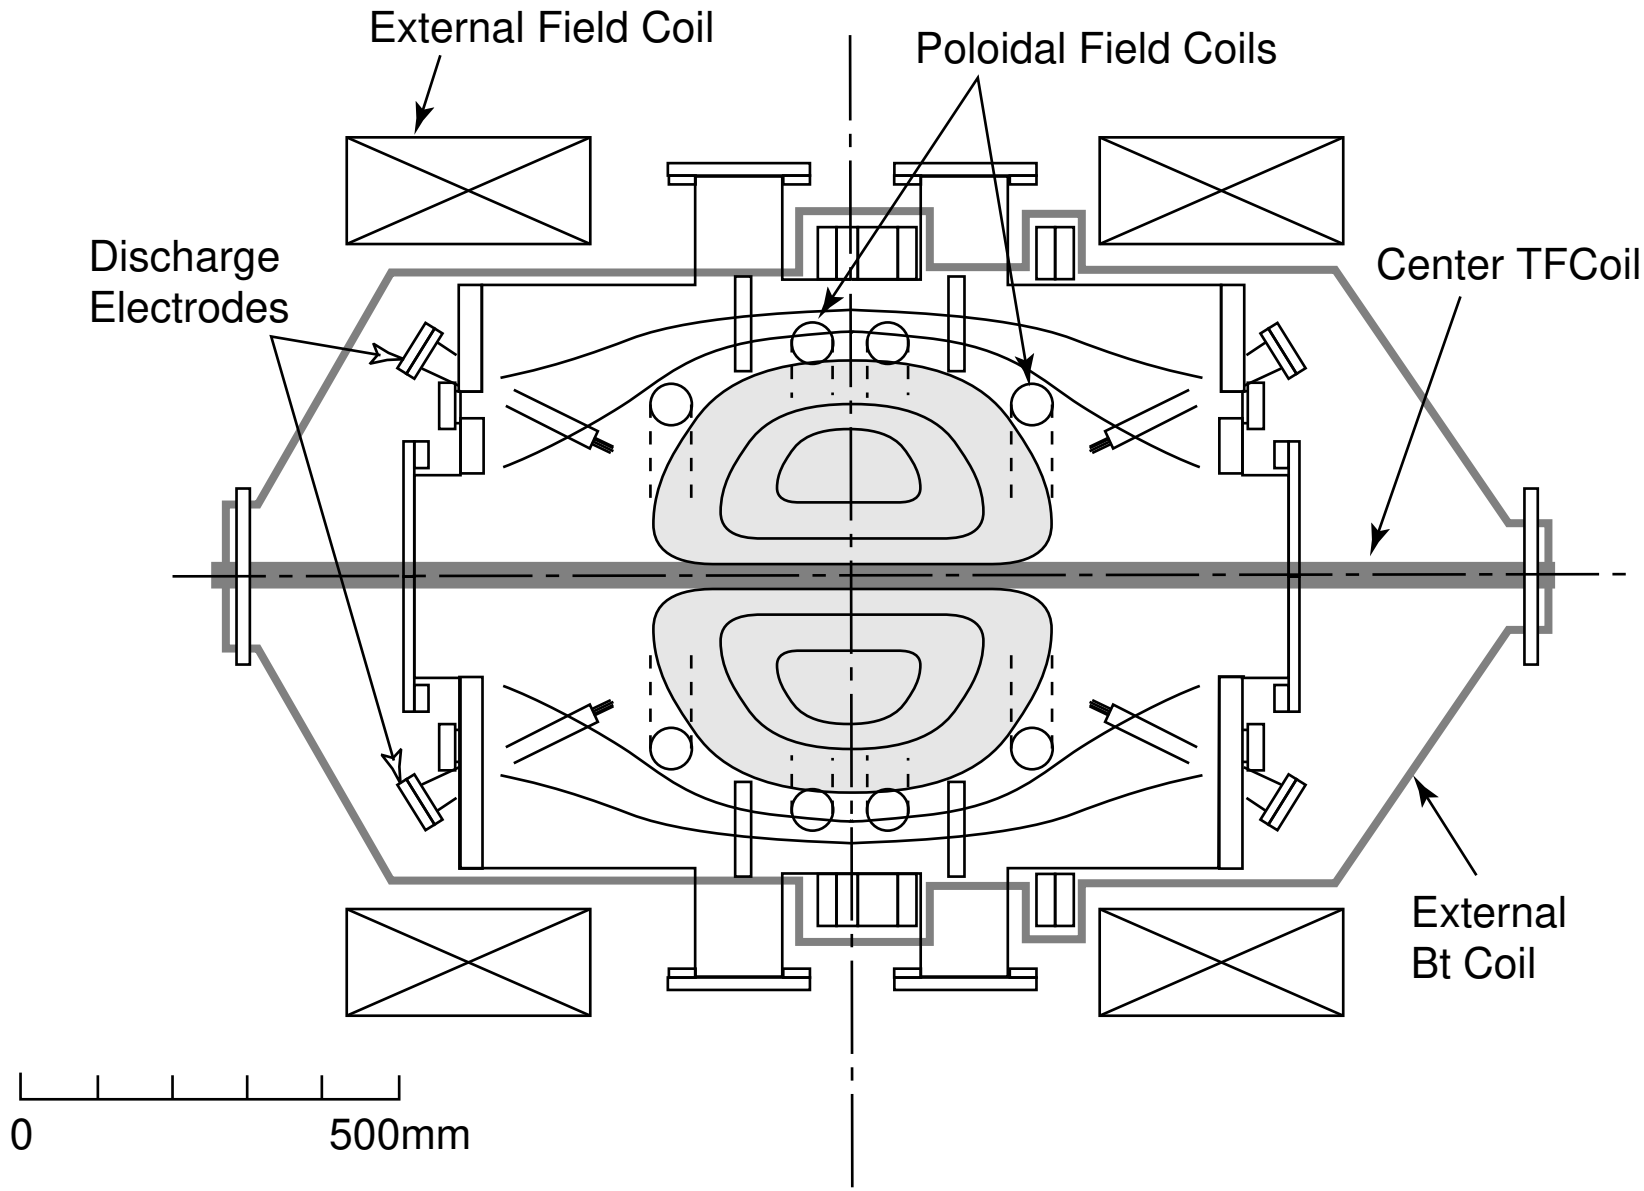
External Field Coil
Poloidal Field Coils
Discharge
Electrodes
Center TFCoil
External
Bt Coil
0
500mm

Fig. 3

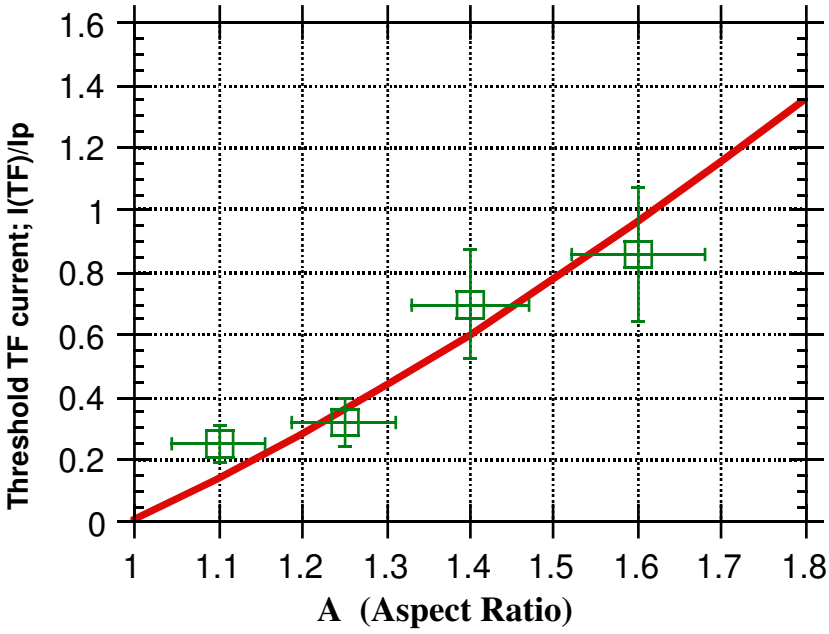
Threshold TF current; I(TF)/Ip
1.6
1.4
1.2
1
0.8
0.6
0.4
0.2
0
1
1.1
1.2
1.3
1.4
1.5
1.6
1.7
1.8
A (Aspect Ratio)

Fig. 4

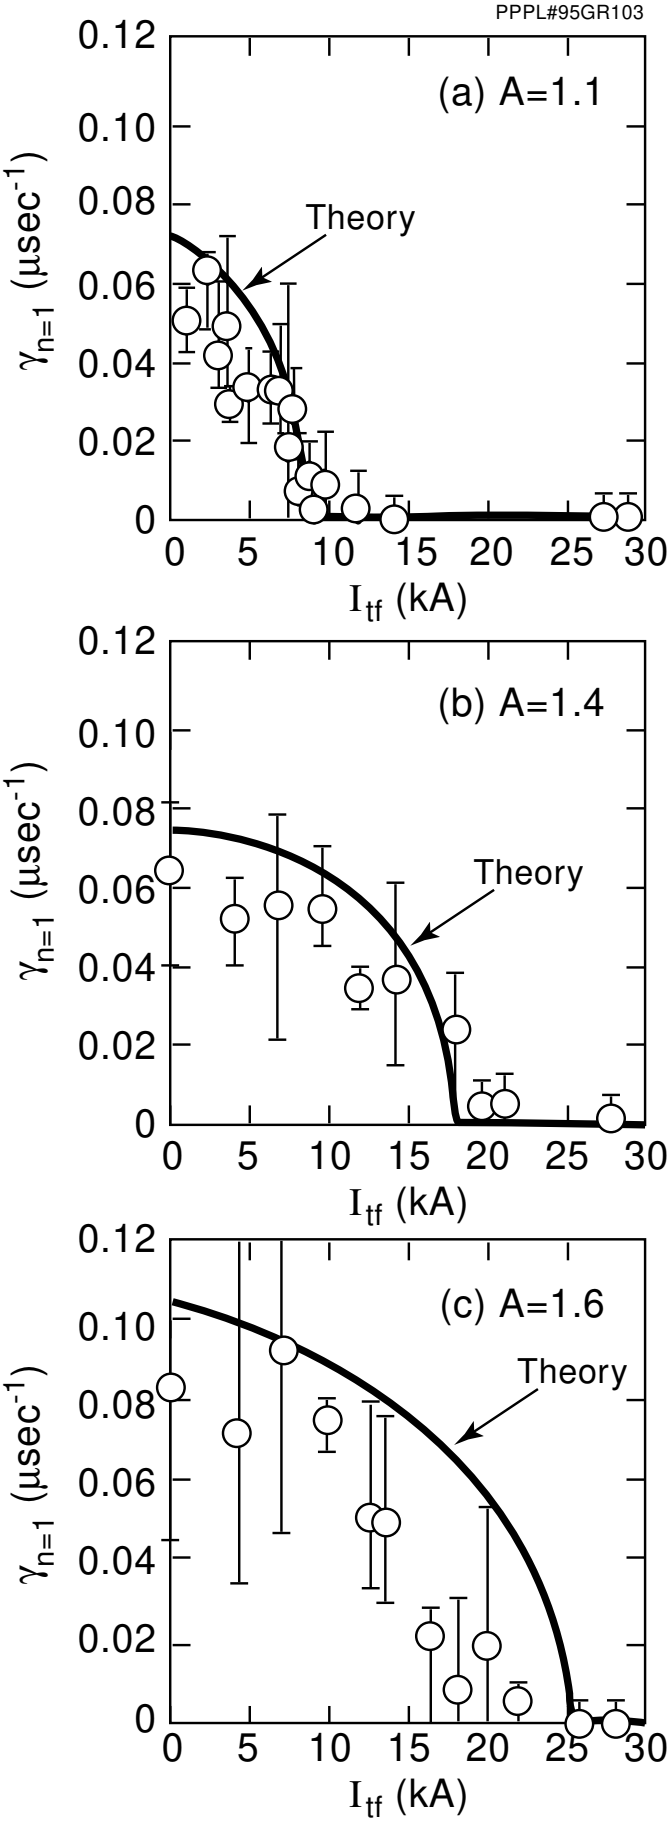
(a) A=1.1
Theory
(b) A=1.4
Theory
(c) A=1.6
Theory
$\gamma_{n=1}$ (μsec^{-1})
I_{tf} (kA)
0.12
0.10
0.08
0.06
0.04
0.02
0
0 5 10 15 20 25 30

Fig. 5